


SHARPY

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.


• **Minimum distance of illuminated objects**

The projector needs to be positioned so that the objects hit by the beam of light are at least 12 metres (39'4") from the lens of the projector.


Standard (3.8°)

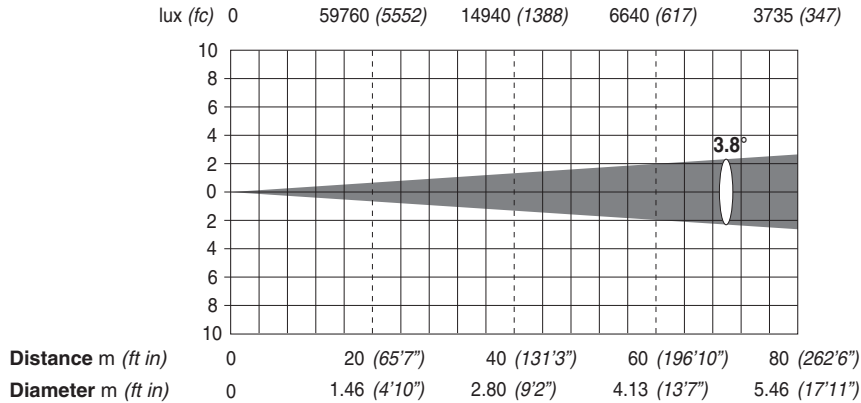

with Frost and Effects Movement at 0% (2.1° 50% - 4.5° 10%)

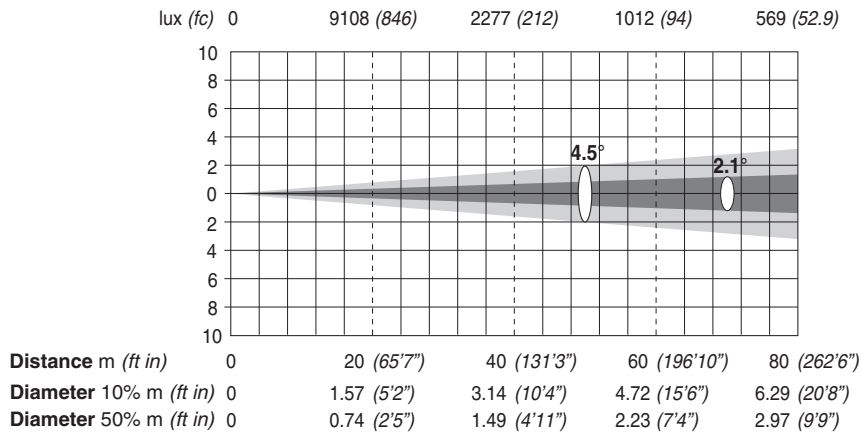


with Frost and Effects Movement at 100% (3.1° 50% - 6.4° 10%)

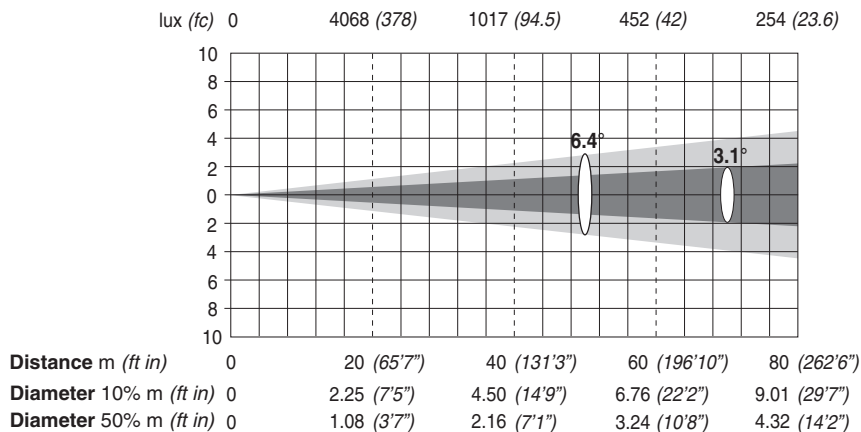


With SHARPY HEAT SCREEN - C61190

An optional filter kit is also available when the SHARPY projector is used in environments that do not meet the minimum allowed distance of **12 metres** from illuminated objects; when this kit is assembled, the projector can be used at a minimum distance of **8 metres** from illuminated objects

Standard (3.8°) + C61190

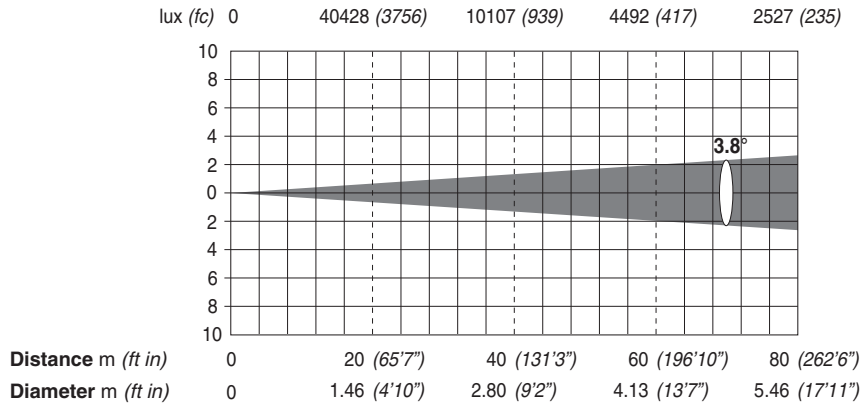

with Frost and Effects Movement at 0% (3.1° 50% - 6.4° 10%) + C61190

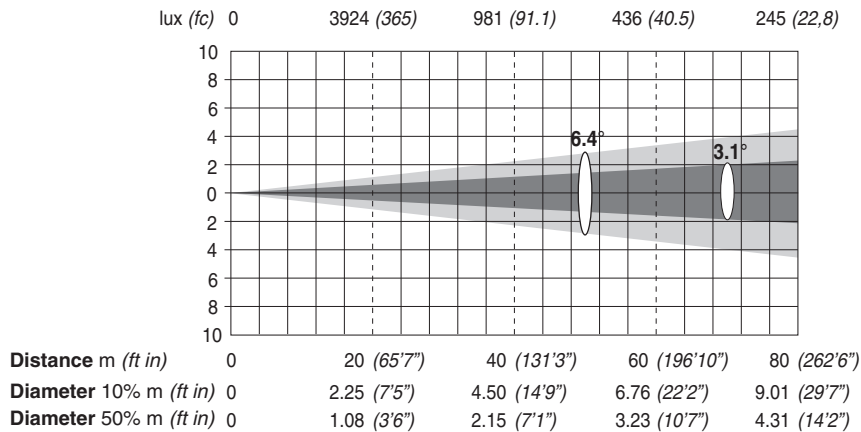

with Frost and Effects Movement at 100% (2.2° 50% - 4.4° 10%) + C61190

