

A.LEDA B-EYE K10 Easy

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES


D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausseuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom with WHITE (6.8° 10% - 4.6° 50%)

Total Output: 1500 lumens

lux (fc) 0 26850 (2494) 9666 (898) 2417 (224) 1074 (99.8)

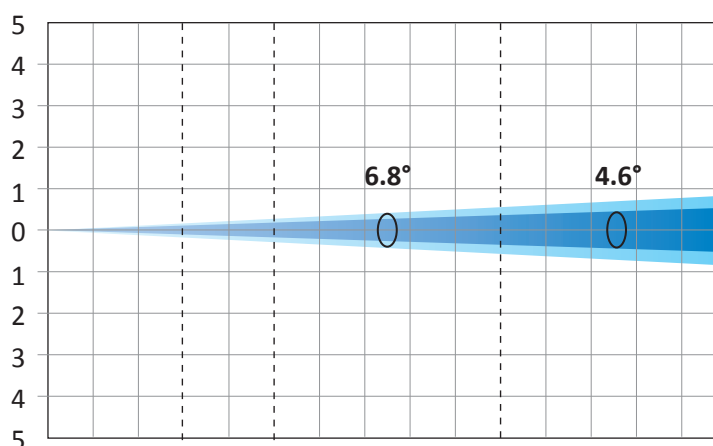


Distance	m (ft in)	0	3 (9' 10'')	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')
Diameter 10%	m (ft in)	0	0.36 (1' 2'')	0.59 (1' 11'')	1.19 (3' 11'')	1.78 (5' 10'')
Diameter 50%	m (ft in)	0	0.24 (0' 9'')	0.40 (1' 4'')	0.80 (2' 8'')	1.20 (3' 11'')

Minimum Zoom with RED (6.8° 10% - 4.6° 50%)

Total Output: 550 lumens

lux (fc) 0 9925 (922) 3573 (332) 893 (83) 397 (36.9)

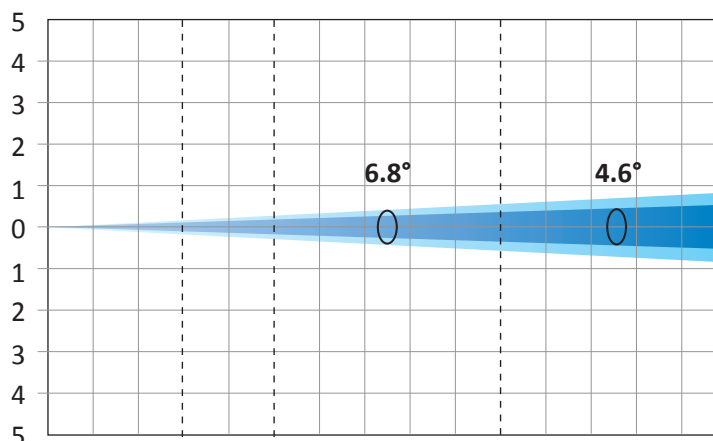

Distance	m (ft in)	0	3 (9' 10'')	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')
Diameter 10%	m (ft in)	0	0.36 (1' 2'')	0.59 (1' 11'')	1.19 (3' 11'')	1.78 (5' 10'')
Diameter 50%	m (ft in)	0	0.24 (0' 9'')	0.40 (1' 4'')	0.80 (2' 8'')	1.20 (3' 11'')

A.LEDA B-EYE K10 Easy


I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

Minimum Zoom with GREEN (6.8° 10% - 4.6° 50%)

Total Output: 1100 lumens

lux (fc) 0 20722 (1925) 7460 (693) 1865 (173) 829 (77)

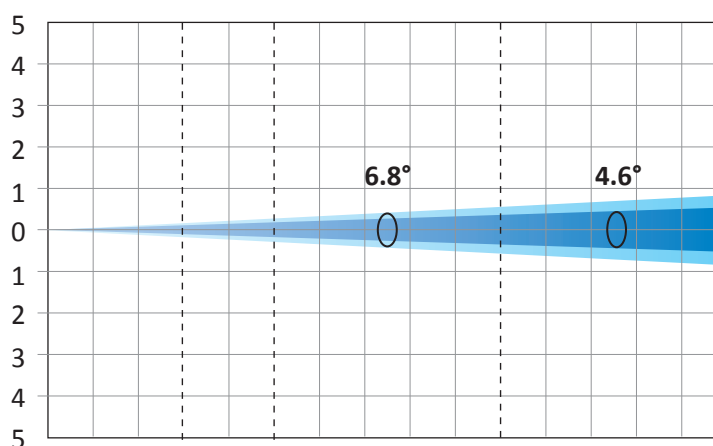


Distance	m (ft in)	0	3 (9' 10'')	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')
Diameter 10%	m (ft in)	0	0.36 (1' 2'')	0.59 (1' 11'')	1.19 (3' 11'')	1.78 (5' 10'')
Diameter 50%	m (ft in)	0	0.24 (0' 9'')	0.40 (1' 4'')	0.80 (2' 8'')	1.20 (3' 11'')

Minimum Zoom with BLUE (6.8° 10% - 4.6° 50%)

Total Output: 150 lumens

lux (fc) 0 2600 (242) 936 (87) 234 (21.7) 104 (9.66)

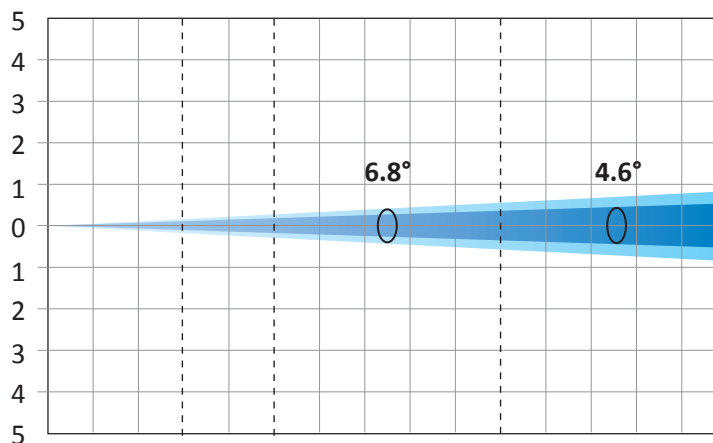

Distance	m (ft in)	0	3 (9' 10'')	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')
Diameter 10%	m (ft in)	0	0.36 (1' 2'')	0.59 (1' 11'')	1.19 (3' 11'')	1.78 (5' 10'')
Diameter 50%	m (ft in)	0	0.24 (0' 9'')	0.40 (1' 4'')	0.80 (2' 8'')	1.20 (3' 11'')

A.LEDA B-EYE K10 Easy


I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

Minimum Zoom with WHITE, RED, GREEN & BLUE (6.8° 10% - 4.6° 50%)

Total Output: 2500 lumens

lux (fc) 0 46019 (4275) 16567 (1539) 4142 (385) 1841 (171)

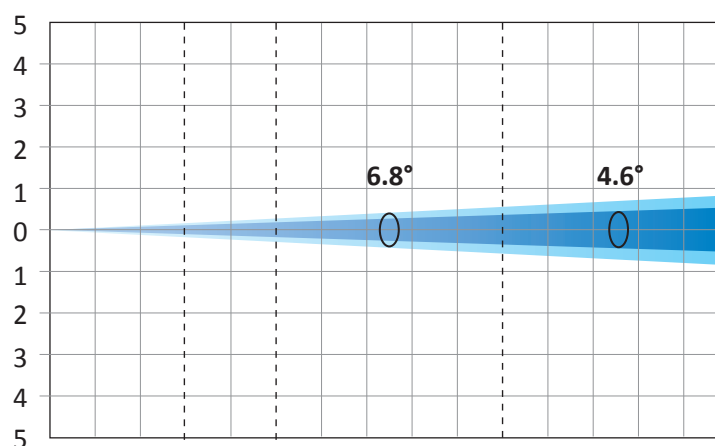


Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.36 (1' 2")	0.59 (1' 11")	1.19 (3' 11")	1.78 (5' 10")
Diameter 50%	m (ft in)	0	0.24 (0' 9")	0.40 (1' 4")	0.80 (2' 8")	1.20 (3' 11")

Maximum Zoom with WHITE (54.6° 10% - 39.4° 50%)

Total Output: 2800 lumens

lux (fc) 0 676 (62.8) 243 (22.6) 61 (5.65) 27 (2.51)

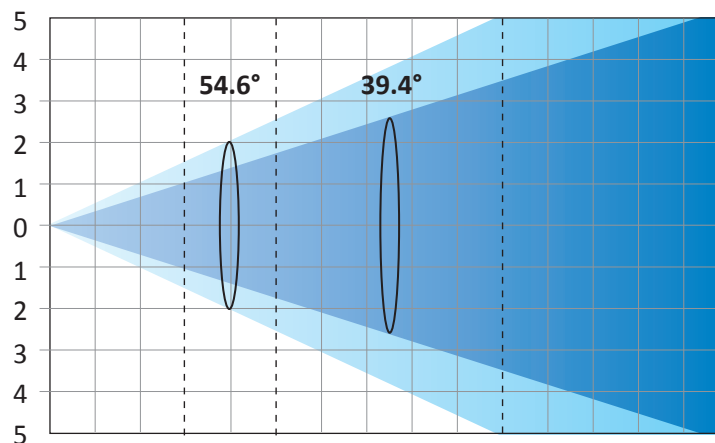

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.10 (10' 2")	5.16 (16' 11")	10.32 (33' 10")	15.48 (50' 10")
Diameter 50%	m (ft in)	0	2.15 (7' 1")	3.58 (11' 9")	7.16 (23' 6")	10.74 (35' 3")

A.LEDA B-EYE K10 Easy


- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

Maximum Zoom with RED (54.6° 10% - 39.4° 50%)

Total Output: 1000 lumens

lux (fc) 0 242 (22.5) 87 (8.09) 22 (2.02) 10 (0.9)

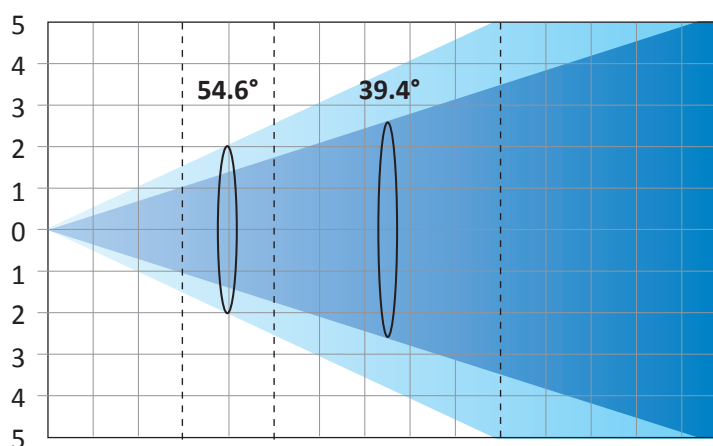


Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.10 (10' 2")	5.16 (16' 11")	10.32 (33' 10")	15.48 (50' 10")
Diameter 50%	m (ft in)	0	2.15 (7' 1")	3.58 (11' 9")	7.16 (23' 6")	10.74 (35' 3")

Maximum Zoom with GREEN (54.6° 10% - 39.4° 50%)

Total Output: 2100 lumens

lux (fc) 0 525 (48.8) 189 (17.6) 47 (4.39) 21 (1.95)

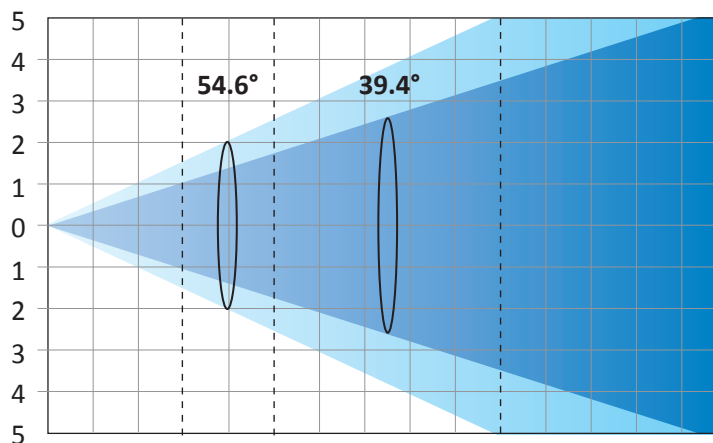

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.10 (10' 2")	5.16 (16' 11")	10.32 (33' 10")	15.48 (50' 10")
Diameter 50%	m (ft in)	0	2.15 (7' 1")	3.58 (11' 9")	7.16 (23' 6")	10.74 (35' 3")

A.LEDA B-EYE K10 Easy


I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

Maximum Zoom with BLUE (54.6° 10% - 39.4° 50%)

Total Output: 300 lumens

lux (fc) 0 68 (6.32) 24 (2.27) 6 (0.57) 3 (0.25)

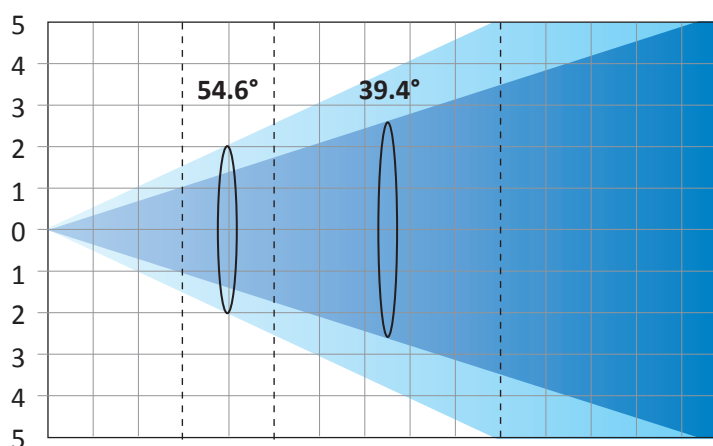


Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.10 (10' 2")	5.16 (16' 11")	10.32 (33' 10")	15.48 (50' 10")
Diameter 50%	m (ft in)	0	2.15 (7' 1")	3.58 (11' 9")	7.16 (23' 6")	10.74 (35' 3")

Maximum Zoom with WHITE, RED, GREEN & BLUE (54.6° 10% - 39.4° 50%)

Total Output: 4800 lumens

lux (fc) 0 1175 (109) 423 (39.3) 106 (9.82) 47 (4.37)

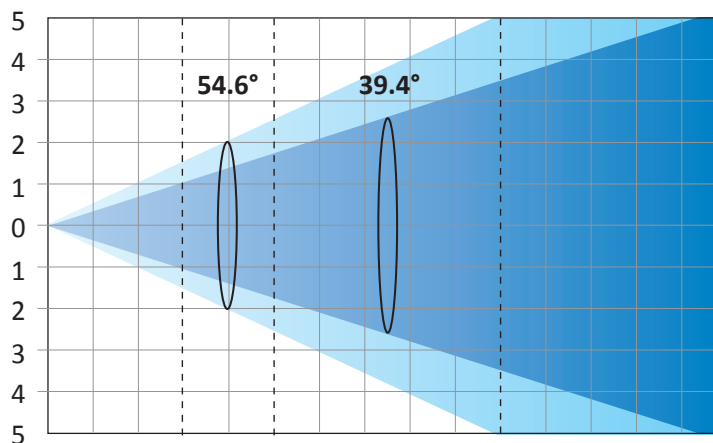

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	3.10 (10' 2")	5.16 (16' 11")	10.32 (33' 10")	15.48 (50' 10")
Diameter 50%	m (ft in)	0	2.15 (7' 1")	3.58 (11' 9")	7.16 (23' 6")	10.74 (35' 3")

A.LEDA B-EYE K10 Easy

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

