


S3-4K

Compact Event Master processor

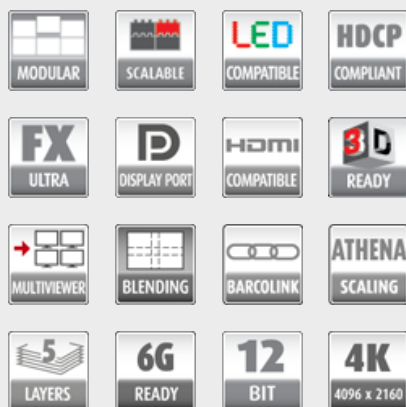

Featuring 12 input channels, 4 PROGRAM outputs, 4 AUX outputs and 2 dedicated Multiviewer outputs, the S3-4K is the E2 image processor's more compact sidekick. Under the hood, however, it boasts the same processing performance, image quality, flexibility and rugged durability. In short: all the tools you need to create a stunning live experience, in a single compact and roadworthy housing.

Powerful features, easy operation

- Modular card-based design
- Interlinking of S3-4K chassis allows expansion of inputs, outputs or layers
- Easy set-up with the cross-platform Event Master Toolset, providing a step-by-step approach to system configuration
- Using the same modular cards as the E2, the S3-4K is serviceable in the field and ready for future signal interfaces
- Dual, redundant power supplies for maximum peace of mind
- Widescreen blending support

S3-4K Jr

Bringing the same performance and features as the S3-4K, the S3-4K Jr model is ideally suited for applications that do not require the full capacity of the S3-4K. It comes with 8 inputs, 4 outputs, and 2 mixers in the same 3 RU form factor as its bigger S3-4K brother. S3-4K Jr grows with your shows so you can easily upgrade the S3-4K Jr to a fully loaded S3-4K system at any time. Simply purchase and install additional cards into your system.

BARCO

Visibly yours

Product specifications

S3-4K

Video inputs	12 inputs via 3 input cards (Event Master series cards) <ul style="list-style-type: none">Up to 3 x 4K inputs - each input card supports up to 4K@60p4 x SD/HD/3G SDI (6G ready)4 x HDMI 1.4a (297 Mpix/sec max)4 x DisplayPort 1.1 (330 Mpix/sec max)
Video outputs	10 outputs via 3 output cards (Event Master series cards) <ul style="list-style-type: none">Up to 2x 4K outputs - each output card supports up to 4K@60 p4 x SD/HD/3G SDI (6G ready)4x HDMI 1.4a (297 Mpix/sec max)2 x HDMI 1.4a for Multiviewer (297 Mpix/sec max)
Genlock	Analog reference input/loop on BNC connectors; bi-level and blackburst at SD and tri-level at HD S3D Sync: 4x input Din connector, 2x output Din connector
Program output	4 program outputs configurable as single screens or tiled/blended widescreens <ul style="list-style-type: none">Configurable from 4X 2048X1200@60 max to 1 x 4096x2400@60 maxIndependent edge blending/feathering control for all four sides
Scaled Aux outputs	User definable from 4 x 2048x1200@60 to 1 x 4K@60 Output color correction
Mixers	<ul style="list-style-type: none">Native resolution background mixer per output screenIndependent layer transitions or full Preview/Program transitionFlexible layer allocation - 4 mixable or 8 single scalable PIP/key layers assignable to any Program output screen
Still stores	Up to 100 HD stills available in background, Aux or PIP
Layer effects	<ul style="list-style-type: none">Borders (hard, soft, halo) and drop shadowsColor effectsStrobe, H&V flipLuma keyPIP moves via Keyframes
Multiviewer	<ul style="list-style-type: none">Flexible user-definable layoutsMonitor all Inputs and Outputs, including Preview and AuxTwo outputsDedicated hardware same as E2 Event Master Processor
Expandability	<ul style="list-style-type: none">Easily expandable for larger display applications via proprietary linksLink units to increase available Inputs and Outputs for larger tiled/blended widescreen applicationsExpansion via simple linking - up to 4 chassisS3-4K ships with the ability to link 2 chassis for expansion. Linking up to 4 chassis will be available in a future software release.
HDCP	HDCP compliant
Control	<ul style="list-style-type: none">Event Master screen management software for PC or MACEthernet RJ-45, 1000/100/10 Mbps autosense
Serviceability	<ul style="list-style-type: none">Field-Serviceable I/O and processing cards (not hot-swappable)Hot-swappable dual-redundant power supplies
Dimensions	<ul style="list-style-type: none">Height: 13.26 cm (5.22 in) - 3 rack mount unitsWidth: 43.2 cm (17 in) without chassis handles, 48.3 cm (19 in) with chassis handles attachedDepth: 54 cm (21.33 in) overall
Weight	24 kg / 53 lbs

Product specifications**S3-4K**

Power	<ul style="list-style-type: none">■ Input power: 100-240 VAC 50/60Hz 700W■ Dual-redundant, hot-swappable power supplies; same as E2 Event Master processor
Environmental temperature	0-40° C / 32-104 F
Environmental humidity	0-95% non-condensing
Warranty	3 years parts and labor