


PREDEFINED
TUNGSTEN
WHITES

OPTIONAL
DIFFUSERS

EVEN OUTPUT
WITHOUT
FRINGING

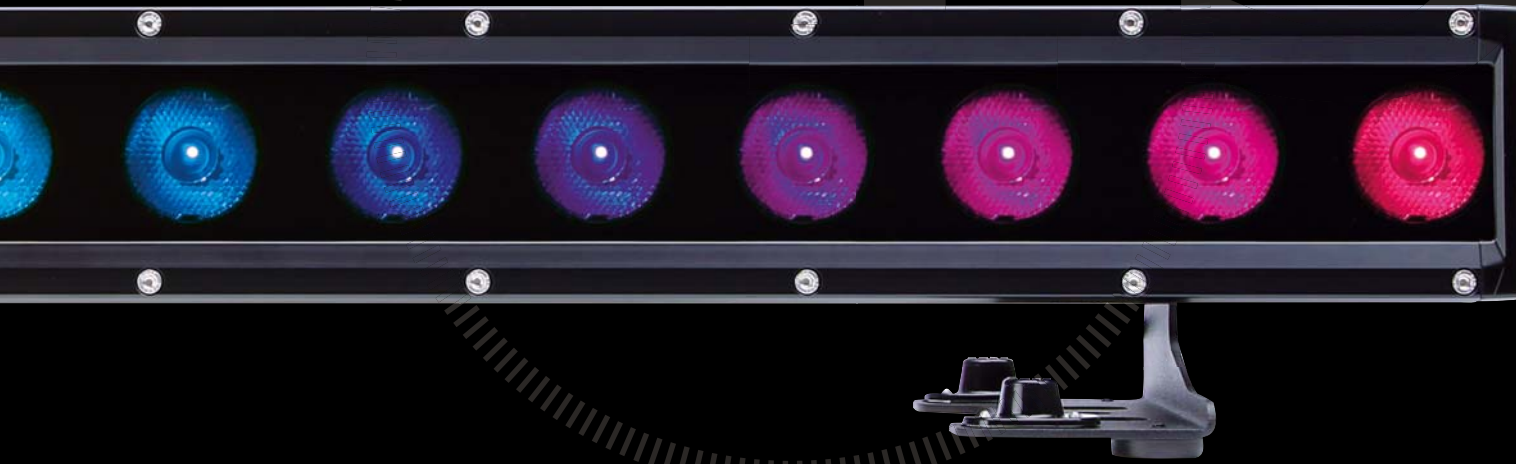

ROBIN®
Innovative Technology

www.robe.cz


ROBE®

Head office: ROBE lighting s. r. o. | Házovice 2090 | 756 61 Rožnov pod Radhoštěm | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | Factory: ROBE lighting s. r. o. | Palackého 416 | 757 01 Valašské Meziříčí | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | UK: ROBE UK Ltd. | Northampton | United Kingdom | Tel.: 01604 741000 | E-mail: info@robeuk.com | France: ROBE Lighting France SAS | ZI Paris Nord 2 | Bâtiment Euler | 33, rue des Vanesses | 93420 Villepinte | Tel.: +33 1 48 63 84 81 | Fax: +33 1 48 63 84 87 | E-mail: info@robelighting.fr | America: ROBE Lighting Inc. | 12349 SW 53rd Street, Suite 202 | Cooper City | Florida | USA | Tel.: +1 954 680 1901 | E-mail: info@robelighting.com | Asia and Pacific: Robe Lighting Asia Pacific Pte. Ltd. | 12 New Industrial Road | #02-05 Morningstar Centre | S-536202 | Singapore | Tel: +65 6280 8558 | E-mail: sales@robeap.com | Middle East: Robe Middle East trading LLC | Office Nbr 507 5th floor | Al Asmawi Building DIP 1 | Dubai | UAE | Po Box: 391 898 | Tel.: +971 4 885 3223 | E-mail: info@robe-me.com | Russia and CIS: Taganskaya str. 26-1-72 | 109004 Moscow | Russia | Tel: +7 495 504 9569 | E-mail: info@roberussia.com | Central and South America: Galicia 1198 ap 303 | 1100 Montevideo | Uruguay | Tel.: +5982 900 67 47 | E-mail: info@robecca.com

September 2015 © ROBE lighting s. r. o. All specifications subject to change without notice. Patents pending.



CycBar 15™



ROBE®

HIGH
POWER
10W
RGBW LEDS

INDIVIDUAL
PIXEL
CONTROL

18 BIT
DIMMING
TECHNOLOGY



CycBar 15™ Innovative technology Fine touch features Product diagrams

Robin CycBar 15 is a lightweight static 1.000 mm linear strip which uses 15 equally spaced superbright RGBW multichip LEDs for enhanced 18 bit smooth colour mixing and linear dimming without RGB 'breakup' or grey shadows. Fixed but redefinable beam angle (lenses of 7.4°, 21.2° and 34.6° are available) allows use of optional diffusers.

Advanced pixel control based driver software provides special features like the virtual colour wheel with pre-programmed colours and a set of true whites with CTO Tungsten lamp emulation and more.

A practical and highly readable small display provides a menu with personality settings plus DMX and RDM protocols.

Source

- Light Source: 15x 10W RGBW LED multichips
- Led Life Expectancy: minimum 60.000 hours
- Typical Lumen Maintenance: 70% @ 60.000 hours
- LED colour variants: RGBW

Optical System

- Beam angle: 7.5° (without diffuser), diffuser 35°x70° included as standard
- Optional diffusers: 32°, 50°, 10°x30°, 30°x10°, 70°x35°
- Colour mixing: RGBW or CMY
- Built-in colour macros and pixel effects: Yes
- CTO filter: 0-100%
- Virtual colour wheel: With 237 colours including whites (2.700 K, 3.200 K, 4.200 K, 5.600 K and 8.000 K)
- Tungsten lamp effect at whites: 2.700 K and 3.200 K (red shift and thermal delay during dimming)
- Colour rainbow effect with variable speed
- Pre-programmed effects: Pixel effects with colour chases, waves and pulses at variable speed and directions
- High resolution dimmer: 0-100%
- Strobe: Variable speed, max. 20 flashes per second
- Pre-programmed: Random strobe & pulse effects

Electrical Specification

- Power supply: Electronic auto-ranging
- Input voltage range: 100-240 V, 50/60 Hz
- Power consumption: 220W at 230 V / 50 Hz
- Compliance: cETLus, CE

Mechanical Specification

- Height: 182 mm (7.2")
- Width: 997 mm (39.3")
- Depth: 180 mm (7.1")
- Weight: 9 kg (20.9 lbs)
- LED module "tilt" adjustment range: -100/+45°
- IP65

Thermal

- Maximum ambient temperature: 40 °C (104 °F)
- Maximum surface temperature: 80 °C (176 °F)

Control and programming


- Setting & Addressing: 4-segment LED display & 4 control buttons
- Protocols: USITT DMX-512, RDM
- Optional wireless version: CRMX™ technology from Lumen Radio included
- Control Channels: 16, 11, 61, 76
- Protocol modes: 4 including SunStrip emulation mode (Halogen Strip)
- Operations modes: DMX, Stand-alone
- Manual control of all effects via control panel
- One editable program, up to 35 steps
- Smooth 16-bit dimming from 0 - 100 %
- DMX data In/Out: DMX outdoor cables CA-0611 (300mm) + NC5MX-HD/ NC5FX-HD (5-pin connectors)
- Power in/out: Neutrik PowerCon

Electromechanical Effects

- Mechanical Tilt Movement Range: 200°

Rigging

- Via two mounting brackets


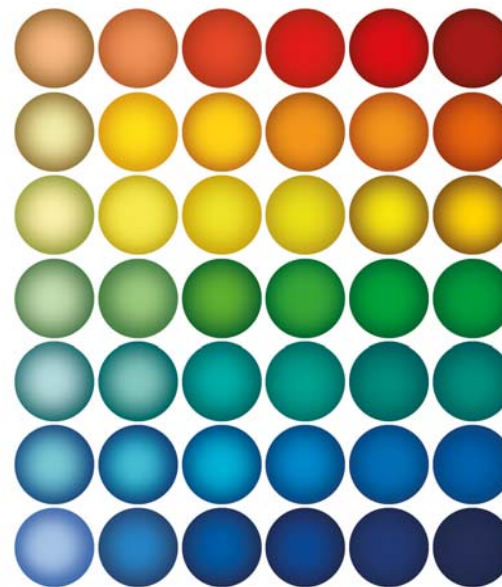


LED colours

CycFX 8™ is able to produce 4,3 billion colours from pastels to saturated.


Multichips

New LED technologies use several LED chips on a single module that creates just perfect point source of extremely smooth new dimensional colour mixing of RGBW.

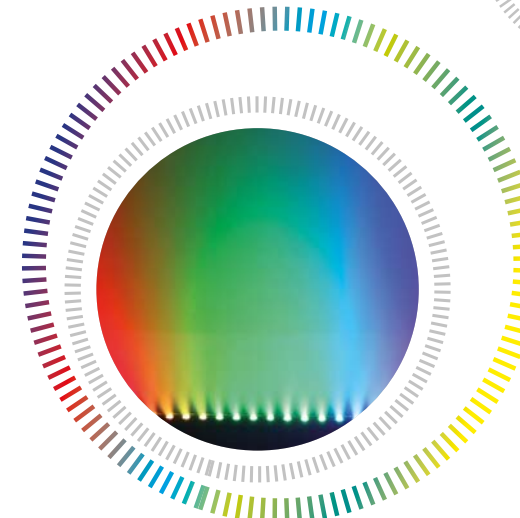

True White Colours

Spotless colormixing of specially calibrated LEDs together with predefined values on a Virtual Colour wheel channel allow quick direct calling of exact white hues of 2.700 K, 3.200 K, 4.200 K, 5.600 K and 8.000 K. In the Halogen lamp mode predefined for White Halogen 2.700 K and 3.200 K, the Dimmer channel initiates halogen lamp-like behaviour (red effect and thermal delay) during dimming.

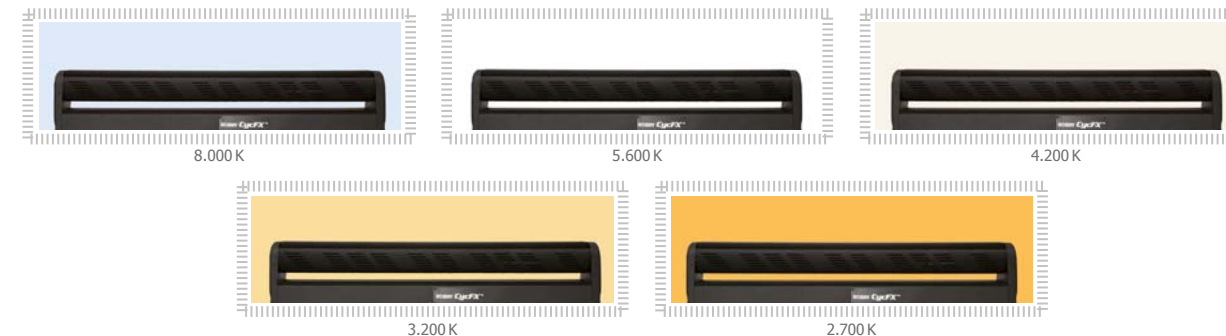

Pixel control

The unique technology allows individual control of each LED pixel. Pre-programmed colour macros and pixel control makes this fixture quick and easy to programme.

