



CAPITAL 300 US

FAÇADE LIGHTING

Combining a minimal, neat design with brilliant performance capabilities, **CAPITAL 300 US** features an ultra-spot, long-shot beam of light capable of reaching remarkable distances with accurate beam angle definition. **CAPITAL 300 US** is the ideal solution for an impressive illumination of high-rise buildings calling for a well-defined impact lighting.




CAPITAL 300 US

GRIVEN


CAPITAL 300 US

GRIVEND

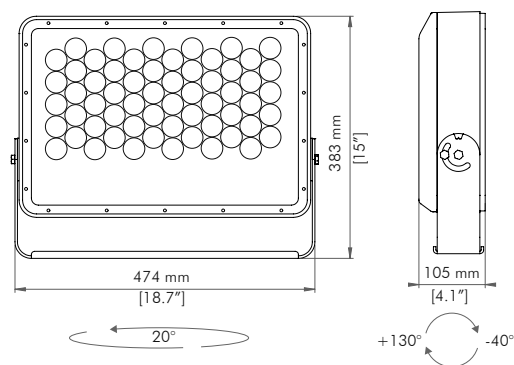

BEAM ANGLE REFERENCE

ULTRA SPOT 3.2°




PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES

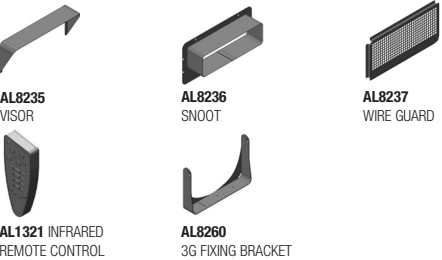

CODES

AL5014 CAPITAL 300
AL5015 CAPITAL 300 POLAR EDITION

OPTICS	LED TYPE	CONTROL SYSTEM
US Ultra spot	RN RGB+W 4000K DW From 2700K to 6500K CW Cold White 6500K NW Natural White 4000K WW Warm White 3000K	R DMX-RDM W DMX-RDM wireless D DALI

FINISH	CABLE TYPE
W White RAL 9003 G GRIVEN Grey A Anthracite RAL 7016 B Black RAL 9005	S POWER IN, DMX IN, DMX OUT C Monocable with connectors M Monocable without connectors

NOTES

Unless an RDM compatible control is used, CAPITAL 300 US must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 300 US units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 300 US is an IP67 powerful light fitting, whose die cast aluminium body hosts 60 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 474 mm x 105 mm x 383 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 300 US units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 0.95A @ 230V / 203W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



USA_620 South Tryon, Charlotte NC