



CAPITAL 300

FAÇADE LIGHTING


Featuring an elegant, stylish design and a sleek profile, which allow a seamless integration in every architectural environment, **CAPITAL 300** is the ideal solution for the dramatic illumination of large scale façades and high-rise buildings calling for high impact lighting. With an industry leading high lumen package, this luminaire effectively achieves desired goals, ranging from wall washing applications to architectural elements distinctive enhancement.



CAPITAL 300


GRIVEN

CAPITAL 300

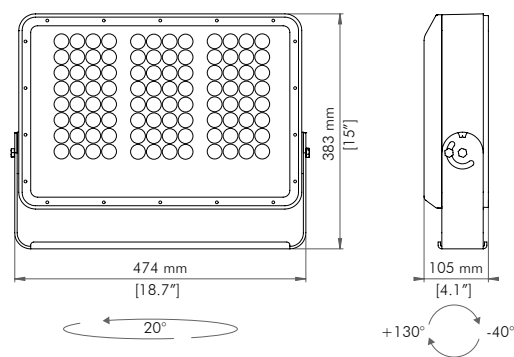

BEAM ANGLE REFERENCE

RGBW		WHITE LIGHT	
SPOT	8°	SPOT	12°
NARROW	12°	NARROW	15°
MEDIUM	23°	MEDIUM	25°
WIDE	43°	WIDE	47°
EXTRA WIDE	68°	EXTRA WIDE	61°
ELLIPTICAL	11°x41°	ELLIPTICAL	14°x39°
ELLIPTICAL WIDE	22°x39°	ELLIPTICAL WIDE	23°x37°
WALL WASH	14°(5° incline)x37°	WALL WASH	19°(5° incline)x38°




PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES

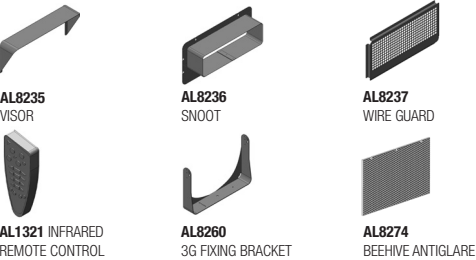

CODES

- AL5014 CAPITAL 300
- AL5015 CAPITAL 300 POLAR EDITION

OPTICS	LED TYPE	CONTROL SYSTEM
SP Spot	RN RGB+W 4000K	R DMX-RDM
NA Narrow	DW From 2700K to 6500K	W DMX-RDM wireless
ME Medium	CW Cold White 6500K	D DALI
WI Wide	NW Natural White 4000K	
EW Extra wide	WW Warm White 3000K	
EL Elliptical		
WL Elliptical wide		
WW Wall wash		

FINISH	CABLE TYPE
W White RAL 9003	S POWER IN, DMX IN, DMX OUT
G GRIVEN Grey	C Monocable with connectors
A Anthracite RAL 7016	M Monocable without connectors
B Black RAL 9005	

NOTES

Unless an RDM compatible control is used, CAPITAL 300 must always be purchased with AL1321 Infrared Remote Control. More CAPITAL 300 units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

CAPITAL 300 is an IP67 powerful floodlight, whose die cast aluminium body hosts 96 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 474 mm x 105 mm x 383 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update), and RDM (Remote device management) functions. DALI or DMX-RDM wireless control available on request. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more CAPITAL 300 units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: RGBW 1.34A @ 230V / 299W max, W 1.3A @ 230V / 290W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



Bolte Bridge