



# JASPER

FAÇADE LIGHTING


Ideal for spot or flood lighting of building façades or large areas, **JASPER** meets the latest design requirements and aesthetical prerequisites demanding for powerful and efficient lighting solutions capable of delivering high level performances with a reduced power consumption.



J A S P E R


GRIVEN

# JASPER

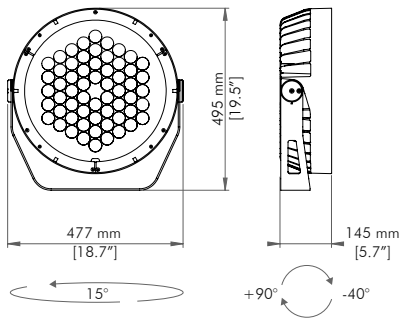


### BEAM ANGLE REFERENCE

RGBW		WHITE LIGHT	
ULTRA SPOT	4°	ULTRA SPOT	7°
SPOT	8°	SPOT	12°
NARROW	11°	NARROW	15°
MEDIUM	23°	MEDIUM	25°
WIDE	43°	WIDE	47°
EXTRA WIDE	69°	EXTRA WIDE	61°
ULTRA WIDE	130°	ULTRA WIDE	130°
ELLIPTICAL	11°x41°	ELLIPTICAL	14°x39°
ELLIPTICAL WIDE	22°x39°	ELLIPTICAL WIDE	23°x37°



PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

### FEATURES AND OPTIONS

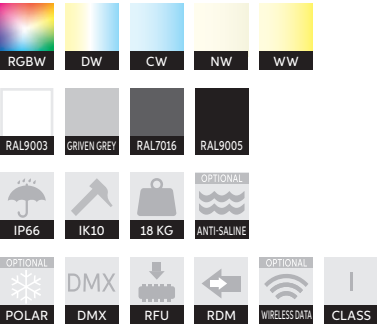

### ACCESSORIES



### CODES

#### AL4360 JASPER

OPTICS	LED TYPE	FINISH	OPTION
US Ultra spot	RN RGB+W 4000K	W White RAL 9003	PE Polar Edition
SP Spot	DW From 2700K to 6500K	G GRIVEN Grey	
NA Narrow	CW Cold White 6500K	A Anthracite RAL 7016	
ME Medium	NW Natural White 4000K	B Black RAL 9005	
WI Wide	WW Warm White 3000K		
EW Extra wide			
UW Ultra wide			
EL Elliptical			
WL Elliptical Wide			

### NOTES

Unless an RDM compatible control is used, JASPER must always be purchased with AL1321 Infrared Remote Control. More JASPER units can be controlled with one AL1321.

### TECHNICAL SPECIFICATIONS

JASPER is an IP66 powerful floodlight, whose aluminium body hosts 60 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 477 mm x 145 mm x 495 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update) and RDM (Remote device management) functions. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more JASPER units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 0.88A @ 230V / 195W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. The Polar Edition, fitted with an integrated de-icing system with electrically heated glass, is available on request. Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



BELGIUM\_Cathedral of Our Lady, Antwerp