



RUBY XP

FAÇADE LIGHTING

RUBY XP is capable of delivering a highly efficient luminous flux taking advantage of the twenty high power LEDs it is fitted with. This stylish and versatile fixture easily conveys spot lighting and wall washing effects at medium to long distances owing to the wide selection of optics groups available.




RUBY XP

GRIVEN


RUBY XP

GRIVEND 

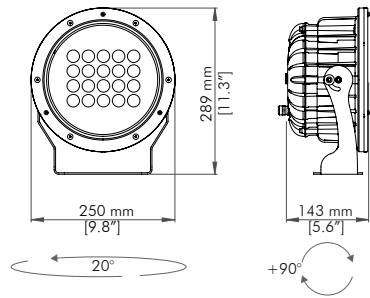

BEAM ANGLE REFERENCE

RGBW		WHITE LIGHT	
SPOT	7°	SPOT	12°
NARROW	11°	NARROW	15°
MEDIUM	20°	MEDIUM	25°
WIDE	43°	WIDE	47°
EXTRA WIDE	68°	EXTRA WIDE	61°
ELLIPTICAL	9°x41°	ELLIPTICAL	14°x39°
ELLIPTICAL WIDE	20°x38°	ELLIPTICAL WIDE	23°x37°
WALL WASH	14°(16° incline)x37°	WALL WASH	19°(5° incline)x38°



PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES



AL4366
BARN DOOR



AL4985
SNOOT



AL4984
VISOR



AL1321 INFRARED
REMOTE CONTROL



AL8225
3G FIXING BRACKET



AL8218
210 mm FIXING BRACKET



AL8219
280 mm FIXING BRACKET



AL8220
350 mm FIXING BRACKET

CODES

AL4422 RUBY XP

OPTICS

SP Spot
NA Narrow
ME Medium
WI Wide
EW Extra wide
EL Elliptical
WL Elliptical wide
WW Wall wash

LED TYPE

RN RGB+W 4000K
DW From 2700K to 6500K
CW Cold White 6500K
NW Natural White 4000K
WW Warm White 3000K

FINISH

W White RAL 9003
G GRIVEN Grey
A Anthracite RAL 7016
B Black RAL 9005

NOTES

Unless an RDM compatible control is used, RUBY XP must always be purchased with AL1321 Infrared Remote Control. More RUBY XP units can be controlled with one AL1321.

TECHNICAL SPECIFICATIONS

RUBY XP is an IP66 medium sized floodlight, whose aluminium body hosts 20 high brightness RGBW, Dynamic White, Cold White, Natural White, Warm White or, on request, monochrome power LEDs. Dimensions: 250 mm x 143 mm x 289 mm. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update) and RDM (Remote device management) functions. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more RUBY XP units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100÷277V / 50-60Hz. Power consumption: 0.18A @ 230V / 37W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. Operating temperature: -30°C to 50°C (-22°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE

