



**SUPERBRIGHT
LED
WASHBEAM**

**LIGHT OUTPUT
11.000 lm
50.000 lx @ 5M**

**ZOOM
4°–48°**

Spiider®

Spiider®

ROBIN®
Innovative Technology

www.robe.cz

ROBE®

Head office: ROBE lighting s. r. o. | Házovice 2090 | 756 61 Rožnov pod Radhoštěm | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | Factory: ROBE lighting s. r. o. | Palackého 416 | 757 01 Valašské Meziříčí | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | UK: ROBE UK Ltd. | Northampton | United Kingdom | Tel.: 01604 741000 | E-mail: info@robeuk.com | France: ROBE Lighting France SAS | ZI Paris Nord 2 | Bâtiment Euler | 33, rue des Vanesses | 93420 Villepinte | Tel.: +33 1 48 63 84 81 | Fax: +33 1 48 63 84 87 | E-mail: info@robelighting.fr | America: ROBE Lighting Inc. | 12349 SW 53rd Street, Suite 202 | Cooper City | Florida | USA | Tel.: +1 954 680 1901 | E-mail: info@robelighting.com | Asia and Pacific: Robe Lighting Asia Pacific Pte. Ltd. | 12 New Industrial Road | #02-05 Morningstar Centre | S-536202 | Singapore | Tel: +65 6280 8558 | E-mail: sales@robeap.com | Middle East: Robe Middle East trading LLC | Office Nbr 507 5th floor | Al Asmawi Building DIP 1 | Dubai | UAE | Po Box: 391 898 | Tel.: +971 4 885 3223 | E-mail: info@robe-me.com | Russia and CIS: Taganskaya str. 26-1-72 | 109004 Moscow | Russia | Tel: +7 495 504 9569 | E-mail: info@roberussia.com | Central and South America: Galicia 1198 ap 303 | 1100 Montevideo | Uruguay | Tel.: +5982 900 67 47 | E-mail: info@robecea.com

September 2016 © ROBE lighting s. r. o. All specifications subject to change without notice. Patents pending.



Spiider®

ROBE®



**SUPERBRIGHT
LED
WASHBEAM**

**INNOVATIVE
FLOWER
EFFECT**

**INDIVIDUAL
PIXEL
CONTROL**

Spiider®

Technical Specification

Spiider®

Product diagrams

THE NEXT BIG THING FROM ROBE!

Spiider, a superbright next generation of LED WashBeam luminaries, using 18x 30 Watt and 1x 60 Watt LEDs and combining it with a very efficient 12:1 zoom optical system ranging from tight 4° Beam to wide 48° Wash, makes the product the most powerful LED fixture on the market!

Beautiful convergence of hard edge in-air effects, punchy beams and smooth homogenized wash is all encapsulated in the unique Spiider.

Rich colors of 19 powerfull RGBW LEDs can create charming wash light with velvety smooth transitions thanks to internal 18bit LED dimming system.

Dynamic video effects are easily achieved by mapping individual pixels and controlled by DMX desk or media servers via sACN with internal HTP merging, DMX or by Kling-Net protocol.

Unique central piece with Robe exclusive Flower Effect is driven by 60W RGBW LED multichip for new innovative sharp multicoloured spikes of light, rotating in both directions at variable speed, adding another new visual effect to the show.

Source

- Light Source Type: 1x 60W RGBW and 18x 30W RGBW LED multichips
- LED Life Expectancy: min. 50.000 hours
- Typical Lumen Maintenance: 70% @ 20.000 hours

Optical System

- Robe's proprietary optical design
- 12:1 Zoom optical system
- Zoom range: 4° – 48°
- High efficient component optics
- Fixture total lumen output: 11.000 lm
- Light output: 50.100 lx @ 5m

Dynamic Effects

- Colour mixing mode: RGBW/CMY
- Individual control of each RGBW pixel
- Variable CTO 2.700K – 8.000K
- Virtual Colour Wheel with 66 preset LEE swatches
- Tungsten lamp emulation at whites 2.700 K and 3.200 K (red shift and thermal delay)
- Colour rainbow effect with variable speed
- Pre-programmed pixel effects and patterns with colour, dimming and strobe chases, waves and pulses at variable speed and directions
- Innovative Flower Effect rotating in both directions at variable speed (patent pending)
- High Resolution Dimmer: 0 – 100%
- Strobe effect: variable speed (max.20 flashes per second)
- Pre-programed random strobe & pulse effects

Control and programming

- Setting & Addressing: Robe Navigation System 2 (RNS2)
- Display: QVGA Robe touch screen with battery backup, gravitation sensor for auto screen positioning, operation memory service log with RTC, stand-alone operation, 3 editable programs - each up to 100 steps
- Protocols: USITT DMX-512, RDM, Art-Net, MA Net, MA Net2, sACN, Kling-Net
- Wireless CRMX™ technology from Lumen Radio (on request)
- Protocol Modes: 4
- Control Channels: 49, 27, 33, 90
- Pan/Tilt resolution: 16 bit
- R,G,B,W colour mixing (internal 18 bit): 8 or 16 bit
- 19x R,G,B pixel control: 8 bit
- Zoom: 8 bit
- Dimmer (internal 18 bit): 8 or 16 bit
- Built-in analyser for easy fault finding

Electrical Specification and Connections

- Power supply: Electronic auto-ranging
- Input Voltage range: 100-240 V AC, 50-60 Hz
- Power Consumption: max. 600W
- Power in Connector: Neutric powerCON TRUE 1
- DMX and RDM data in/out: Locking 3-pin & 5-pin XLR
- Ethernet Port in/out: RJ45
- Embedded Ethernet switch 10/100 Mbps: 1x in/ 1x out

Approvals

- CE compliant
- cETLus compliant (pending)

Mechanical Specification

- Height: 477 mm (18.7")
- Width: 390 mm (15.3")
- Depth: 286 mm (11.3")
- Weight: 13,3kg (29.2 lbs)

Rigging and Mounting

- Mounting points: 2 pairs of ¼ -turn locking points
- 2x Omega brackets with ¼-turn quick locks
- Universal operating position
- Safety cable attachment point
- Tilt transport lock


Thermal Specification

- Maximum ambient temperature: 45 °C (113 °F)
- Maximum surface temperature: 75 °C (167 °F)
- Minimal operating temperature: - 5°C (23 °F)



Innovative Flower Effect

The new innovative Flower Effect creates sharp multicoloured spikes of light, rotating in both directions at variable speed, adding new visual effect to the show! (patent pending)



Proprietary Optical System

Robe RnD have designed a new very efficient 12:1 zoom optical system with a range from 4° to 48°, resulting in light output of over 11.000 lumens and intensity of 50.000 lux @5m. (patent pending)

Pixel Control

Individual pixel control of each LED via DMX or Kling-Net protocols allows to turn the fixture to the low res screen or to create variety of spectacular beam effects in the air.


True White Colours

Spotless colormixing of specially calibrated LEDs together with predefined values on a Virtual Colour wheel channel allow quick direct calling of exact white hues of 2.700K, 3.200K, 4.200K, 5.600K and 8.000K.



Tungsten effect

In the Halogen lamp mode predefined for White Halogen 2.700K and 3.200K, the Dimmer channel initiates halogen lamp-like behaviour (red effect and thermal delay) during dimming.

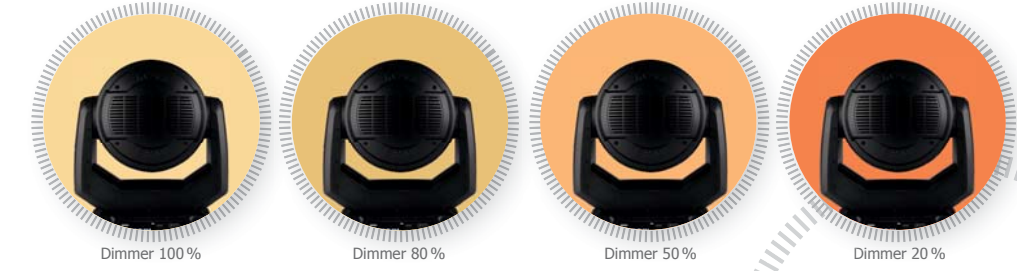

Max. Zoom



Min. Zoom



Flower Effect

