



ROTATING
AND STATIC
GOBOS

FAST
MOVEMENT

LOW
POWER
CONSUMPTION

VIVATM CMY

Packaging

Cartboard Viva TM CMY	Foam Shell Viva TM CMY	Single Top Loader Case Viva TM CMY	Dual Top Loader Case Viva TM CMY	Quad Top Loader Case Viva TM CMY
485 x 420 x 730 mm (19.1" x 16.5" x 28.7")	270 x 440 x 600 mm (10.6" x 17.3" x 23.6")	485 x 420 x 730 mm (19.1" x 16.5" x 28.7")	610 x 600 x 865 mm (24.1" x 23.6" x 34.1")	1060 x 600 x 860 mm (41.7" x 24.6" x 33.9")



www.robe.cz



Head office: ROBE lighting s. r. o. | Házovice 2090 | 756 61 Rožnov pod Radhoštěm | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | Factory: ROBE lighting s. r. o. | Palackého 416 | 757 01 Valašské Meziříčí | Czech Republic | Tel.: +420 571 751 500 | Fax: +420 571 751 515 | E-mail: robe@robe.cz | UK: ROBE UK Ltd. | Northampton | United Kingdom | Tel.: 01604 741000 | E-mail: info@robeuk.com | France: ROBE Lighting France SAS | ZI Paris Nord 2 | Bâtiment Euler | 33, rue des Vanesses | 93420 Villepinte | Tel.: +33 1 48 63 84 81 | Fax: +33 1 48 63 84 87 | E-mail: info@robelighting.fr | North America: ROBE Lighting Inc. | 12349 SW 53rd Street, Suite 202 | Cooper City | Florida | USA | Tel.: +1 954 680 1901 | E-mail: info@robelighting.com | Asia and Pacific: Robe Lighting Asia Pacific Pte. Ltd. | 12 New Industrial Road | #02-05 Morningstar Centre | S-536202 | Singapore | Tel.: +65 6280 8558 | E-mail: sales@robeap.com | Middle East: Robe Middle East trading LLC | Office Nbr 507 5th floor | Al Asmawi Building DIP 1 | Dubai | UAE | Po Box: 391 898 | Tel.: +971 4 885 3223 | E-mail: info@robe-me.com | Russia and CIS: Taganskaya str. 26-1-72 | 109004 Moscow | Russia | Tel: +7 495 504 9569 | E-mail: info@roberussia.com | Central and South America: Galicia 1198 ap 303 | 1100 Montevideo | Uruguay | Tel.: +5982 900 67 47 | E-mail: info@robecea.com

March 2017 © ROBE lighting s. r. o. All specifications subject to change without notice. Patents pending.



VIVATM CMY

WHITE LED
ENGINE

CMY
COLOUR
MIXING
SYSTEM

ZOOM
9°-40°



Viva™ CMY

Powerfully smooth, Robe's VIVA CMY combines brightness of exceptionally clear zero-fringing white beam together with continuous color transitions of CMY mixing. Elegant and lightweight, packed with smart effects that are easy to use. The fixture is very powerful yet consumes little energy.

The 350W white LED light engine gives an extra punchy beam and an incredible 20.000 hours of operation – in fact, no relamping will be needed for the entire life of the fixture!

Smooth color transition and fixed vivid and radiant colours can be applied from CMY mixing system and colour wheel, and rotating or static gobos added for projections or mid-air effects. The smooth zoom can go out to 40 degrees at its widest and be softened it up with variable frost to create a gentle wash-like output or dynamic background projections.

The minimum 9° zoom produces a piercing beam that can be trimmed with ultra-fast stepless iris for really punchy output, and VIVA has extremely fast pan/tilt movement using Robe's proprietary EMS™ (Electronic Motion Stabiliser) technology.

That and much more is possible with VIVA™ CMY – entertaining and contemporary!

Source

- Light source type: 350 W White LED engine
- LED life expectancy: min. 20.000 hours
- Typical lumen maintenance: 70% @ 20.000 hours
- Light source warranty: 3 years or 20.000 hours

Optical System

- Robe's proprietary optical design
- High - efficiency zoom optical system, ratio 4,5:1
- Zoom range: 9°-40°
- Output lens diameter: 120 mm
- Fixture total lumen output: 9.660 lm
- Light output: 23.100 lx @ 5m

Dynamic Effects

- Cyan: 0–100%
- Magenta: 0–100%
- Yellow: 0–100%
- Colour Wheel: 6 fixed dichroic colours + white
- Virtual Colour Wheel: with 66 preset swatches
- Rotating gobo wheel: 7 rotating, indexable, replaceable "SLOT&LOCK" glass gobos + open
- Static gobo wheel: 9 aluminium gobos + open
- Prism: 3-facet circular rotating prism
- Iris: Motorized, stepless, pulse effects up to 3 Hz
- Effects: 3-facet circular rotating prism
- Frost: Variable, replaceable 20° frost filter; optional 1°, 10° and 30°
- Motorized zoom and focus
- Shutter: Electronic with variable speed strobe (max.20 flashes per second)
- Pre-programmed random strobe & pulse effects
- High resolution electronic dimming: 0–100%

Control and programming

- Setting & Addressing: ROBE Navigation System 2 (RNS2)
- Display: QVGA Robe touch screen with battery backup, gravitation sensor for auto screen positioning, operation memory service log with RTC, stand-alone operation with 3 editable programs (each up to 100 steps), built-in analyser for easy fault finding
- Protocols: USITT DMX-512, RDM, ArtNet, MA Net, MA Net2, sACN
- Wireless: Wireless CRMX™ technology from Lumen Radio (on request)
- DMX protocol modes: 2
- Control channels: 32, 26
- Pan/Tilt resolution: 16 bit
- CMY: 8 bit
- Colour wheel positioning: 8 bit
- Rotating gobo wheel positioning: 8 bit
- Gobo indexing & rotation: 8 or 16 bit
- Static gobo wheel positioning: 8 or 16 bit
- Iris: 8 or 16 bit
- Frost: 8 bit
- Zoom: 8 or 16 bit
- Focus: 8 or 16 bit
- Dimmer: 8 or 16 bit (internal 18 bit)

Static Gobos

- Aluminium wheel with 9 fixed gobos + open position
- Image diameter: 23.0 mm
- Thickness: 0.5 mm

Rotating Gobos

- Gobo Wheel: 7x Rotating Glass Gobos
- Outside diameter: 26.8 mm
- Image diameter: 22.0 mm
- Thickness: 1.1 mm
- Max. Thickness: 4.0 mm
- Material: High temperature borofloat or better glass
- "SLOT&LOCK" system for easy replacement of gobos

Movement

- Pan movement: 540°
- Tilt movement: 270°
- Movement control: Standard and Speed
- Controllable speed of Pan/Tilt movement
- EMS™: Electronic Motion Stabilizer system for Pan & Tilt reducing beam deviation caused by truss movement or vibration (Patent pending)
- Automatic Pan/Tilt position correction

Thermal Specification

- Maximum ambient temperature: 45 °C (113 °F)
- Maximum surface temperature: 80 °C (176 °F)
- Minimum operating temperature: -5 °C (23 °F)

Approvals

- CE Compliant
- cETLUS Compliant (pending)

White LED Engine

New powerful white 350W LED engine with low power consumption specifically designed for VIVA CMY offers 20.000 hours lifetime and very compact size. Innovative design with sophisticated heat management ensures very quiet operation.



Electrical Specification and Connections

- Power supply: Electronic auto-ranging
- Input voltage range: 100–240 V, 50/60 Hz
- Power consumption: 400W at 230 V / 50 Hz
- Power in connector: Neutric powerCON TRUE1
- DMX and RDM data in/out: Locking 3-pin & 5-pin XLR
- Ethernet port in: RJ45

Mechanical Specification

- Height: 675 mm (26.6") – head in vertical position
- Width: 280 mm (11.0")
- Depth: 220 mm (8.7")
- Weight: 19 kg (41.9 lbs)

Rigging

- Mounting positions: Horizontally or vertically
- Universal operating position
- Mounting points: 2 pairs of 1/4-turn locking points
- 2x Omega adaptors with 1/4-turn quick locks
- Pan and Tilt transport locks

Included Items

- User Manual
- Omega Adaptor CL-regular 2 pcs
- Power cord including powerCON TRUE1 In connector

Accessories


- Frost 1° (exchange) assembled
- Frost 10° (exchange) assembled
- Frost 30° (exchange) assembled
- Trigger Clamp Doughty
- Safety wire 35 kg
- Single Top Loader Case
- Dual Top Loader Case
- Quad Top Loader Case
- Foam Shell

Legal

- VIVA™ CMY is a rademark of Robe lighting s.r.o.
- VIVA™ CMY is patented by Robe lighting s.r.o. and is protected by one or more pending or issued patents



CMY Colour Mixing system:

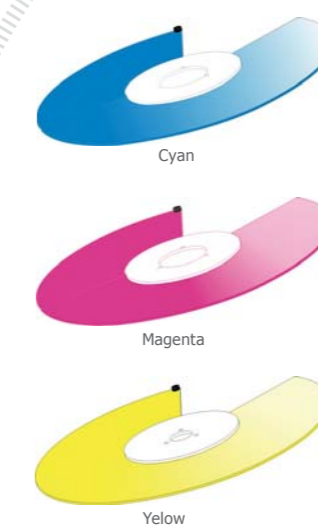

Rotating gobo wheel



Static gobo wheel

