

MYTHOS

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.


Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

MINIMUM DISTANCE OF ILLUMINATED OBJECTS

The projector needs to be positioned so that the objects hit by the beam of light are at least 18 meters (59 ft) from the lens of the projector.

Beam Mode (2.5°)


Total Output: 20790 lumens

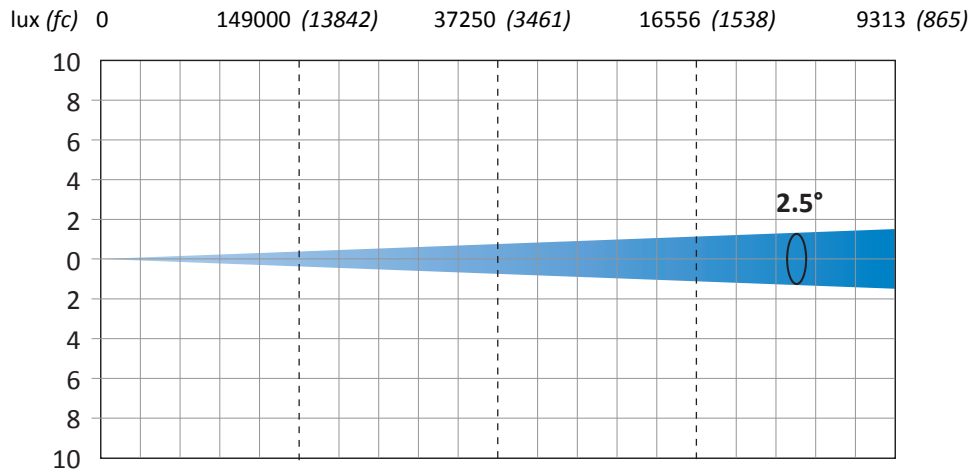

Distance	m (ft in)	0	20 (65' 7")	40 (131' 3")	60 (196' 10")	80 (262' 6")
Diameter	m (ft in)	0	0.86 (2' 10")	1.73 (5' 8")	2.59 (8' 6")	3.45 (11' 4")

Minimum Zoom (4.5°)

Total Output: 24180 lumens

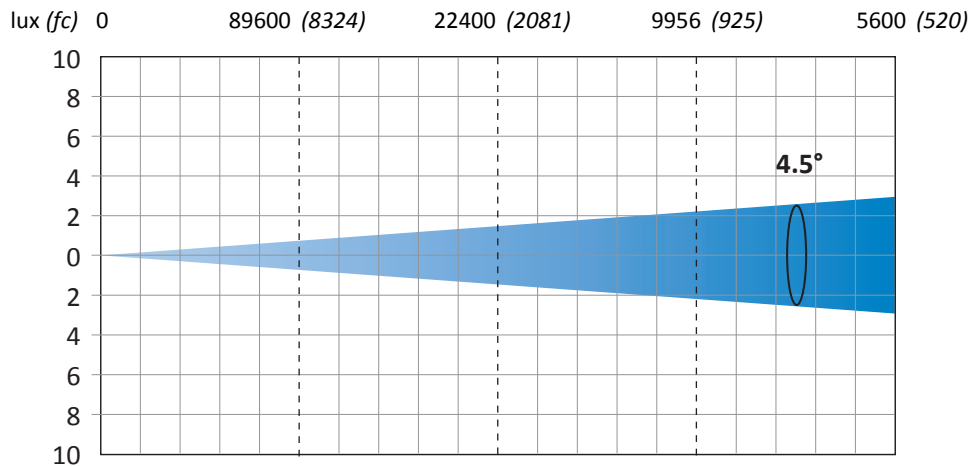


Distance	m (ft in)	0	20 (65' 7")	40 (131' 3")	60 (196' 10")	80 (262' 6")
Diameter	m (ft in)	0	1.58 (5' 2")	3.16 (10' 4")	4.74 (15' 7")	6.32 (20' 9")

MYTHOS

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Minimum Zoom with Frost (10.2° 10% - 5.2° 50%)


Total Output: 20530 lumens

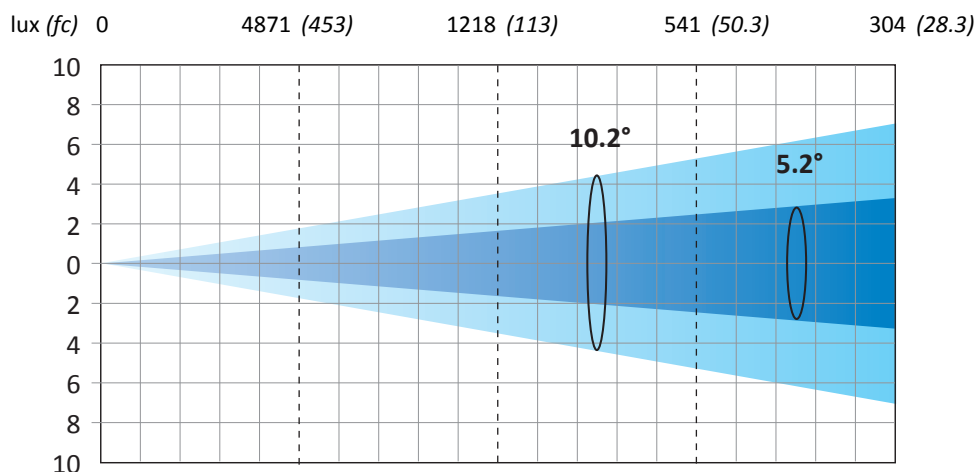

Distance	m (ft in)	0	20 (65' 7")	40 (131' 3")	60 (196' 10")	80 (262' 6")
Diameter 10%	m (ft in)	0	3.56 (11' 8")	7.12 (23' 4")	10.68 (35' 0")	14.24 (46' 9")
Diameter 50%	m (ft in)	0	1.82 (6' 0")	3.64 (11' 11")	5.46 (17' 11")	7.28 (23' 11")

Maximum Zoom (30.8°)

Total Output: 22060 lumens

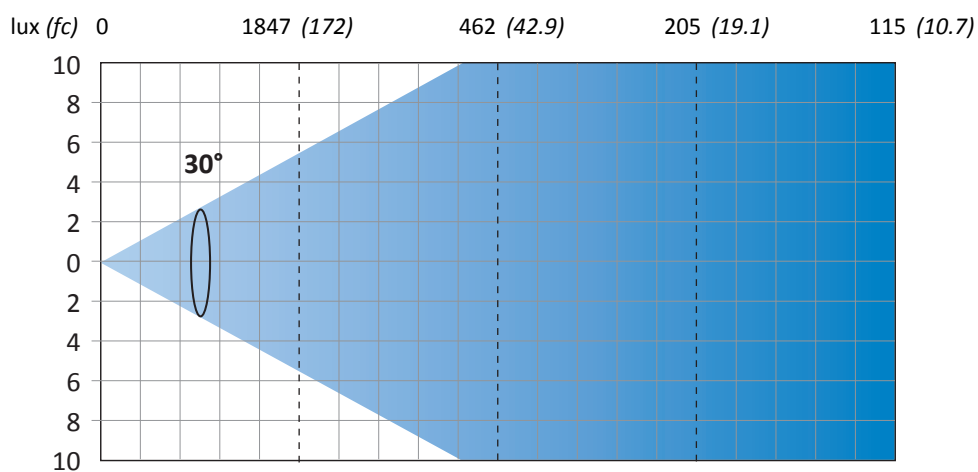


Distance	m (ft in)	0	20 (65' 7")	40 (131' 3")	60 (196' 10")	80 (262' 6")
Diameter	m (ft in)	0	11.00 (36' 1")	22.00 (72' 2")	33.00 (108' 3")	44.00 (144' 4")

MYTHOS

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES


Maximum zoom with Frost (47.3°)

Total Output: 20100 lumens

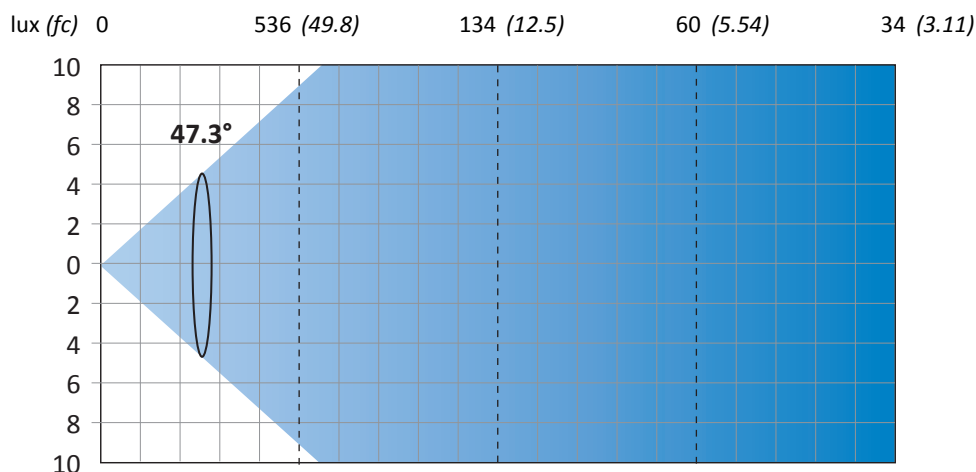

	0	536 (49.8)	134 (12.5)	60 (5.54)	34 (3.11)
Distance	m (ft in)	20 (65' 7")	40 (131' 3")	60 (196' 10")	80 (262' 6")
Diameter	m (ft in)	17.50 (57' 5")	35.00 (114' 10")	52.50 (172' 3")	70.00 (229' 8")

Mythos - Illuminance Distribution at distance = 20m

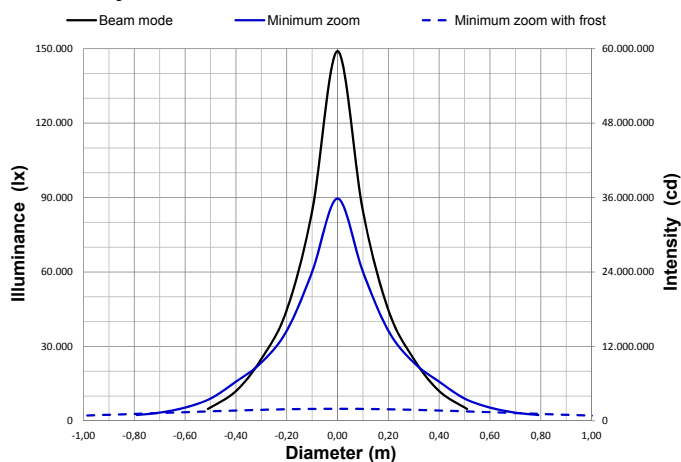

Mythos - Illuminance Distribution at distance = 5m

