

Ruby MC DW




Date: 22.06.2018
Operator: PR

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980SPDW RUBY MC DW SPOT SYM / Luminaire Data Sheet

Luminous emittance 1:

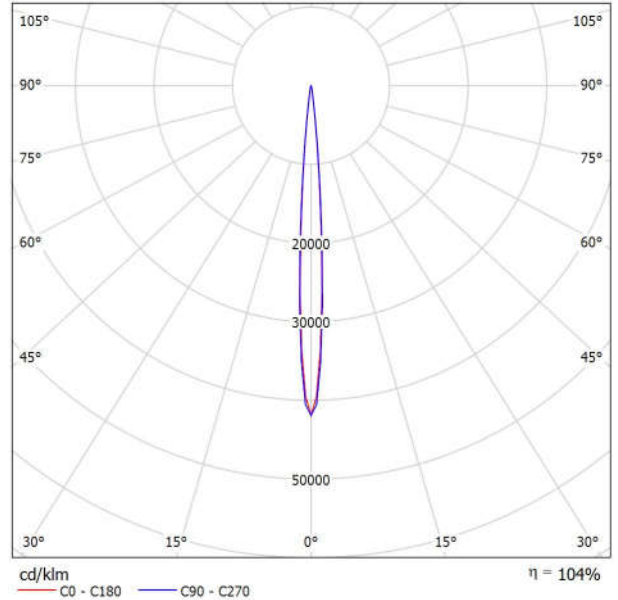

Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 105

Griven Srl AL4980SPDW RUBY MC DW SPOT SYM

Article No.: AL4980SPDW

Luminous flux (Luminaire): 1767 lm

Luminous flux (Lamps): 1698 lm

Luminaire Wattage: 57.0 W

Luminaire classification according to CIE: 100

CIE flux code: 98 100 100 100 105

Fitting: 1 x XP-G3 DW (Correction Factor 1.000).


RUBY MC DW is a newly engineered, medium-sized rounded spotlight which houses six high power dynamic white LEDs, as well as in-built electronics and power supply unit. This stylish and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The dynamic white set-up features an unprecedented white light output and a stunning visual rendering of warm tones, natural hues and cool shades altogether. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must have our Infrared Remote Control (Code Ref. AL1321). The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980SPDW RUBY MC DW SPOT SYM / Cone Diagram

Luminaire: Griven Srl AL4980SPDW RUBY MC DW SPOT SYM
Lamps: 1 x XP-G3 DW

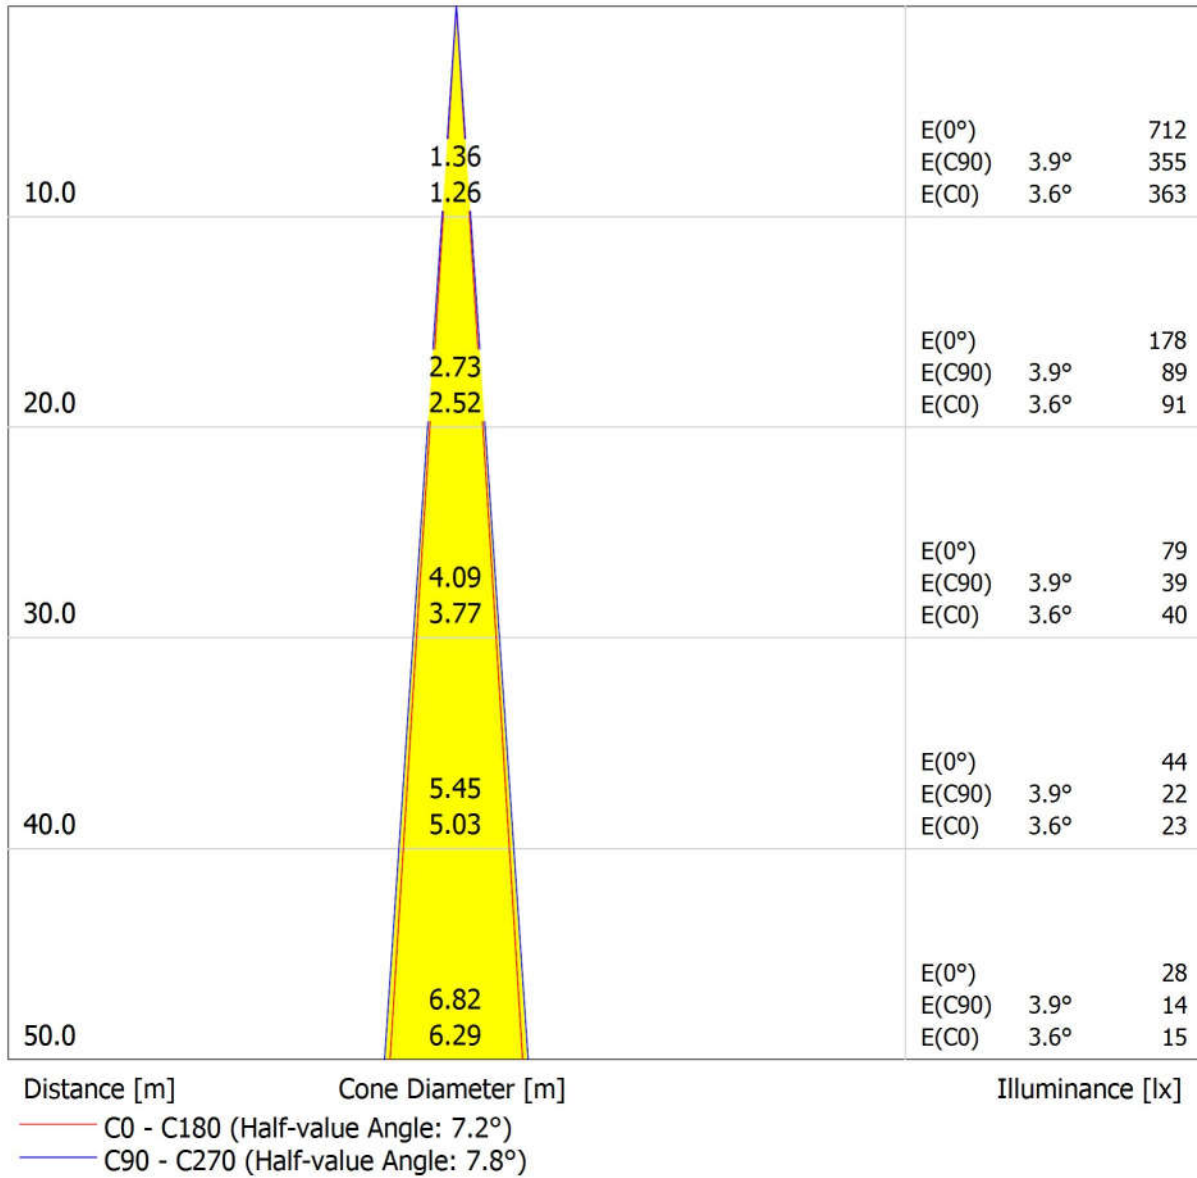


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980NADW RUBY MC DW NARROW SYM / Luminaire Data Sheet

Luminous emittance 1:

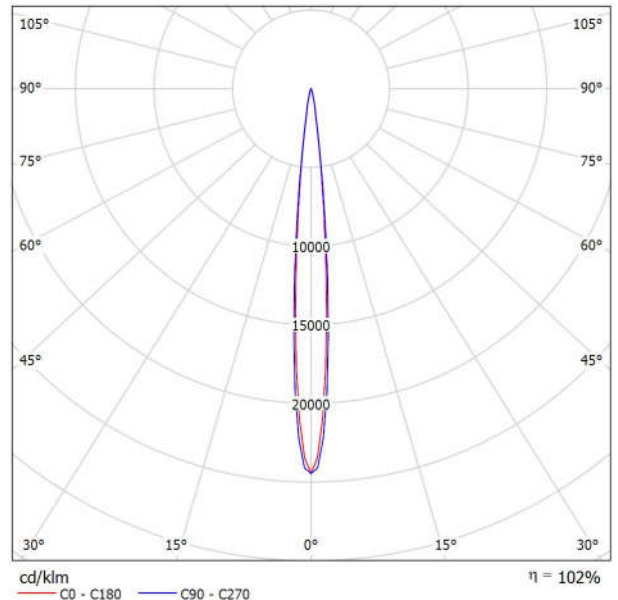

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 103

Griven Srl AL4980NADW RUBY MC DW
NARROW SYM
Article No.: AL4980NADW
Luminous flux (Luminaire): 1673 lm
Luminous flux (Lamps): 1641 lm
Luminaire Wattage: 57.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 103
Fitting: 1 x XP G3 DW (Correction Factor 1.000).

RUBY MC DW is a newly engineered, medium-sized rounded spotlight which houses six high power dynamic white LEDs, as well as in-built electronics and power supply unit. This stylish and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The dynamic white set-up features an unprecedented white light output and a stunning visual rendering of warm tones, natural hues and cool shades altogether. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must have our Infrared Remote Control (Code Ref. AL1321). The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980NADW RUBY MC DW NARROW SYM / Cone Diagram

Luminaire: Griven Srl AL4980NADW RUBY MC DW NARROW SYM
Lamps: 1 x XP-G3 DW

5.0	0.86	E(0°)		1605
	0.79	E(C90)	4.9°	810
10.0	1.71	E(C0)	4.5°	811
	1.57	E(0°)		401
15.0	2.57	E(C90)	4.9°	203
	2.36	E(C0)	4.5°	203
20.0	3.43	E(0°)		178
	3.15	E(C90)	4.9°	90
25.0	4.29	E(C0)	4.5°	90
	3.94	E(0°)		100
30.0	5.14	E(C90)	4.9°	51
	4.72	E(C0)	4.5°	51
35.0	6.00	E(0°)		64
	5.51	E(C90)	4.9°	32
		E(C0)	4.5°	32

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 9.0°)
- C90 - C270 (Half-value Angle: 9.8°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980MEDW RUBY MC DW MEDIUM SYM / Luminaire Data Sheet

Luminous emittance 1:

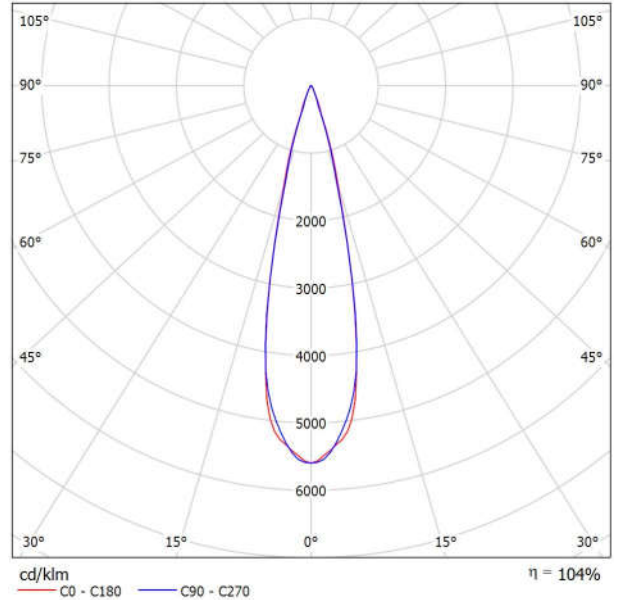

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 105

Griven Srl AL4980MEDW RUBY MC DW
MEDIUM SYM
Article No.: AL4980MEDW
Luminous flux (Luminaire): 1679 lm
Luminous flux (Lamps): 1612 lm
Luminaire Wattage: 57.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 105
Fitting: 1 x XP-G3 DW (Correction Factor 1.000).

RUBY MC DW is a newly engineered, medium-sized rounded spotlight which houses six high power dynamic white LEDs, as well as in-built electronics and power supply unit. This stylish and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The dynamic white set-up features an unprecedented white light output and a stunning visual rendering of warm tones, natural hues and cool shades altogether. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must have our Infrared Remote Control (Code Ref. AL1321). The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980MEDW RUBY MC DW MEDIUM SYM / Cone Diagram

Luminaire: Griven Srl AL4980MEDW RUBY MC DW MEDIUM SYM
Lamps: 1 x XP-G3 DW



Distance [m] Cone Diameter [m] Illuminance [Ix]


— C0 - C180 (Half-value Angle: 24.4°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980WIDW RUBY MC DW WIDE SYM / Luminaire Data Sheet

Luminous emittance 1:

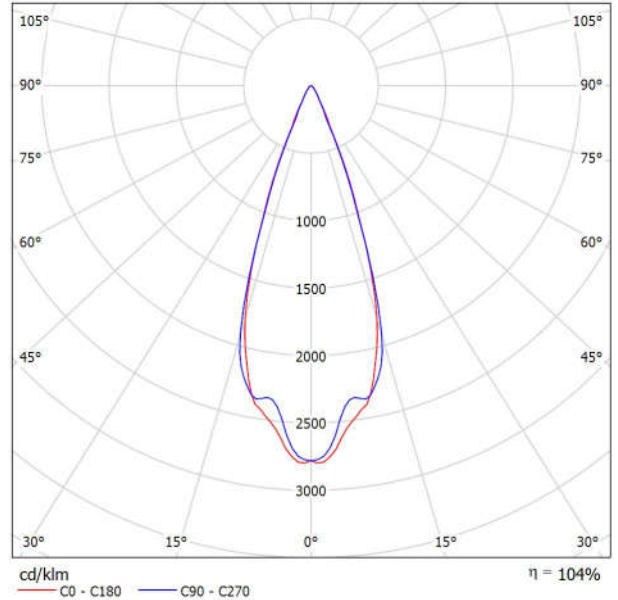

Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 104

Griven Srl AL4980WIDW RUBY MC DW WIDE SYM
Article No.: AL4980WIDW
Luminous flux (Luminaire): 1657 lm
Luminous flux (Lamps): 1597 lm
Luminaire Wattage: 57.0 W
Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 104
Fitting: 1 x XP G3 DW (Correction Factor 1.000).


RUBY MC DW is a newly engineered, medium-sized rounded spotlight which houses six high power dynamic white LEDs, as well as in-built electronics and power supply unit. This stylish and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The dynamic white set-up features an unprecedented white light output and a stunning visual rendering of warm tones, natural hues and cool shades altogether. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must have our Infrared Remote Control (Code Ref. AL1321). The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4980WIDW RUBY MC DW WIDE SYM / Cone Diagram

Luminaire: Griven Srl AL4980WIDW RUBY MC DW WIDE SYM
Lamps: 1 x XP-G3 DW

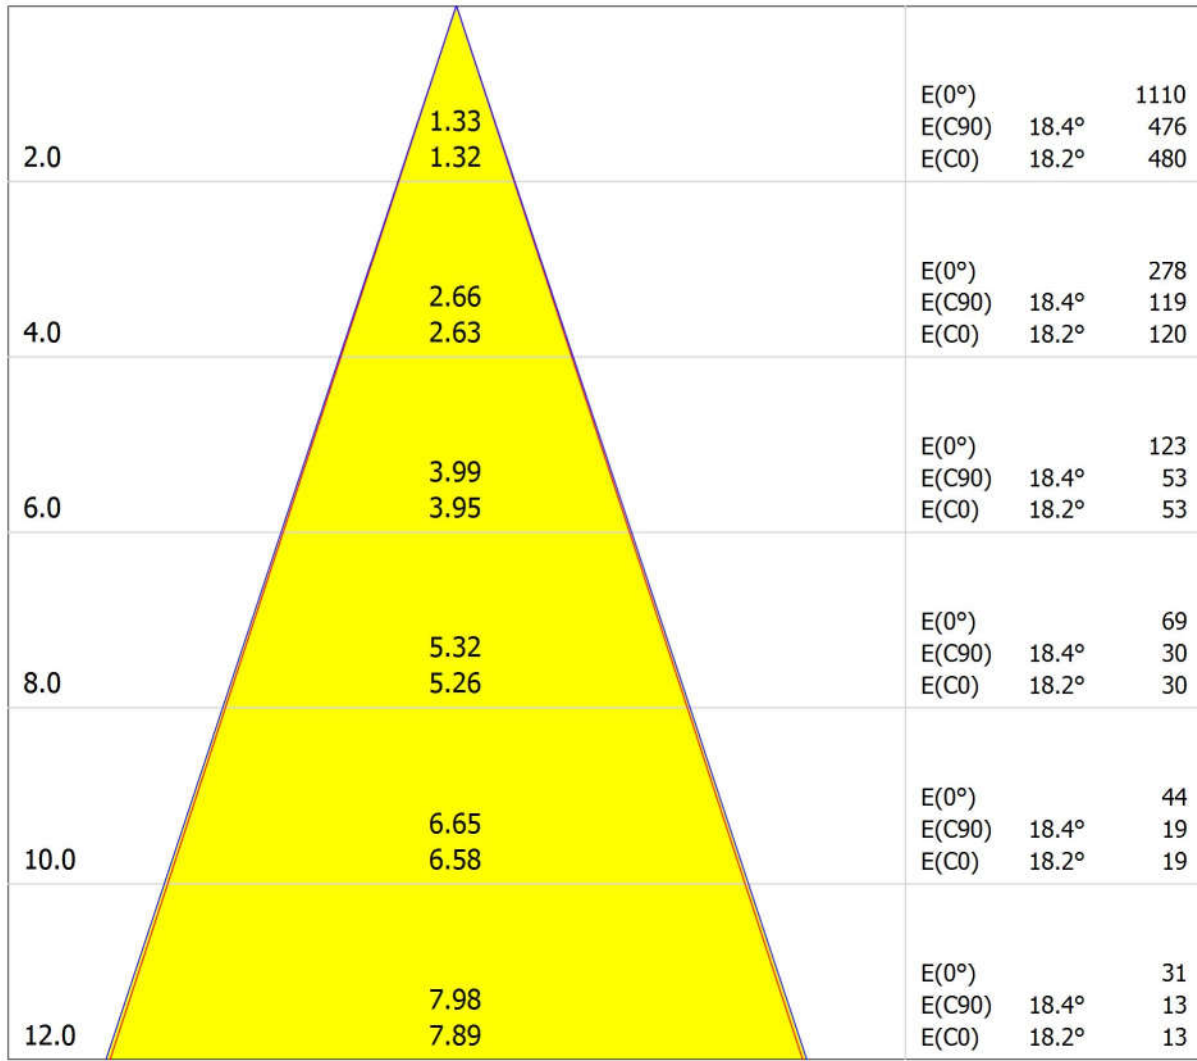

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 36.4°)
- C90 - C270 (Half-value Angle: 36.8°)