

AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI

GB PHOTOMETRIC DIAGRAMMS

F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRISCHE DIAGRAMME

E DIAGRAMAS FOTOMÉTRICOS

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.


Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Aussleuchtung.

Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

900W POWER MODE


Maximum Zoom (40.6°)

Total Output: 24131 lumens - 900W POWER MODE

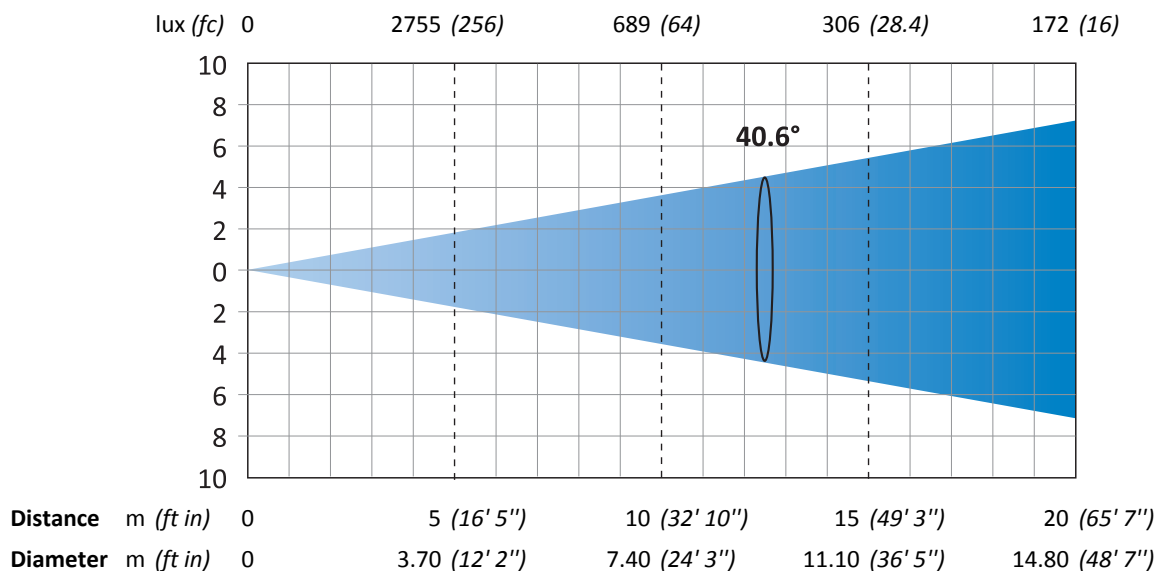

Maximum Zoom with Light Frost (42.9° 10% - 38.8° 50%)

Total Output: 22151 lumens - 900W POWER MODE

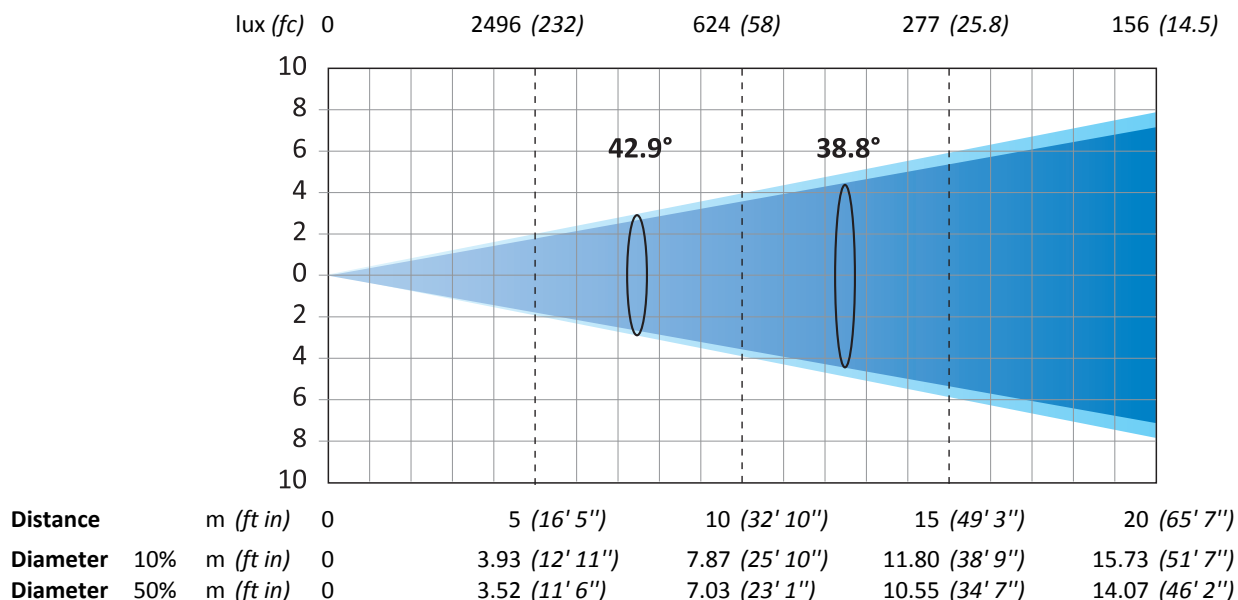


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS

Maximum Zoom with Heavy Frost (43.4° 10% - 38.2° 50%)


Total Output: 22052 lumens - 900W POWER MODE

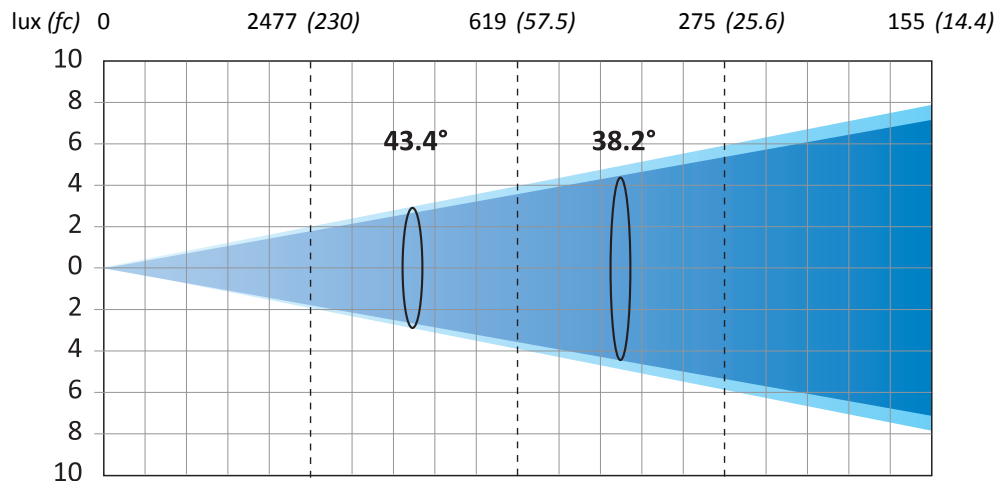

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	3.98 (13' 1")	7.97 (26' 2")	11.95 (39' 2")	15.93 (52' 3")
Diameter 50%	m (ft in)	0	3.47 (11' 4")	6.93 (22' 9")	10.40 (34' 1")	13.87 (45' 6")

Minimum Zoom (Zoom 50% - Focus 72%) (17.1°)

Total Output: 22755 lumens - 900W POWER MODE

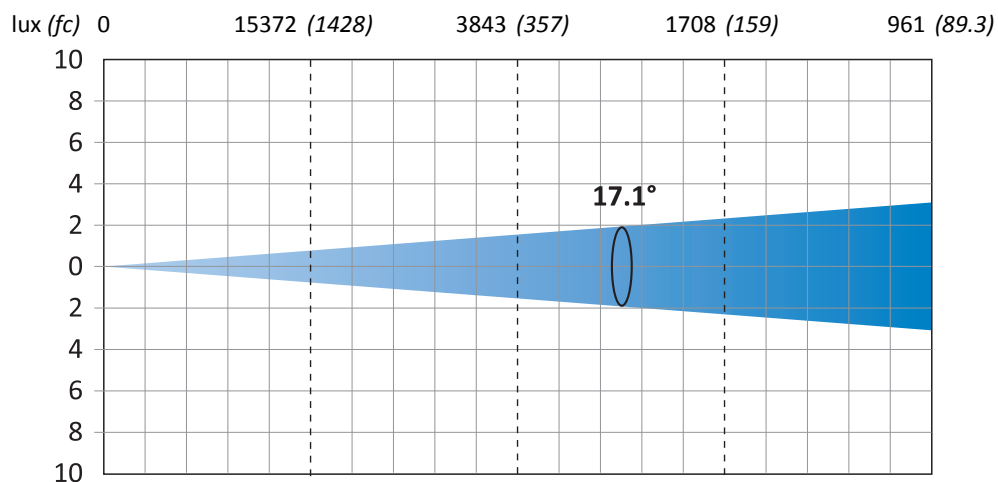

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter	m (ft in)	0	1.50 (4' 11")	3.00 (9' 10")	4.50 (14' 9")	6.00 (19' 8")


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS

Minimum Zoom with Light Frost (Zoom 50% - Focus 72%) (18.1° 10% - 16.4° 50%)


Total Output: 20853 lumens - 900W POWER MODE

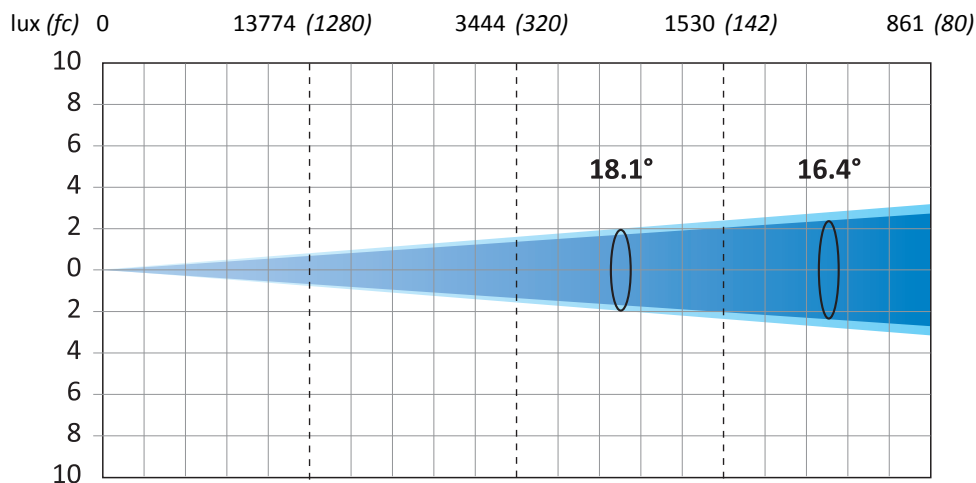

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	1.59 (5' 3")	3.18 (10' 5")	4.77 (15' 8")	6.36 (20' 10")
Diameter 50%	m (ft in)	0	1.44 (4' 9")	2.88 (9' 5")	4.32 (14' 2")	5.76 (18' 11")

Minimum Zoom with Heavy Frost (Zoom 50% - Focus 72%) (19.4° 10% - 15.9° 50%)

Total Output: 20838 lumens - 900W POWER MODE

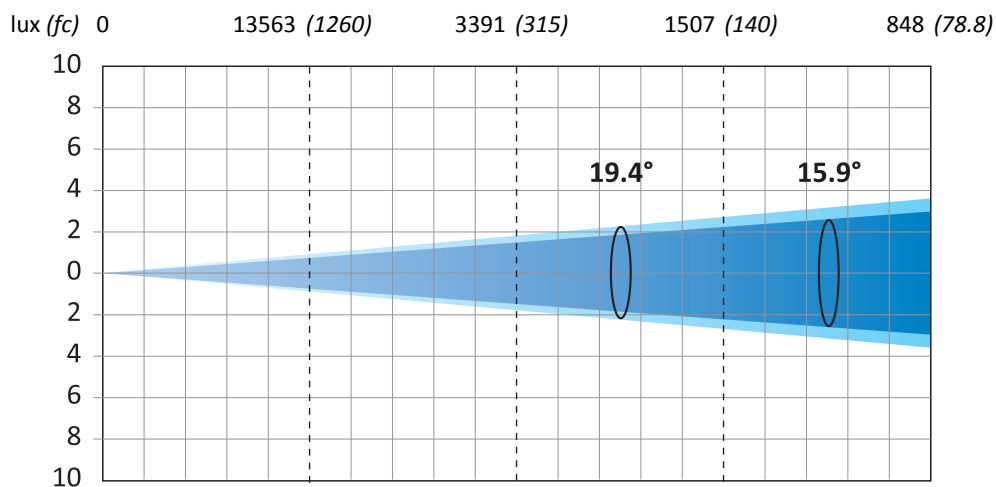

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	1.71 (5' 7")	3.42 (11' 3")	5.13 (16' 10")	6.84 (22' 5")
Diameter 50%	m (ft in)	0	1.40 (4' 7")	2.80 (9' 2")	4.20 (13' 9")	5.60 (18' 4")


AXCOR PROFILE 900-8K

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMAS FOTOMÉTRICOS

Minimum Zoom in extra-run (6.8°)


Total Output: 7807 lumens - 900W POWER MODE

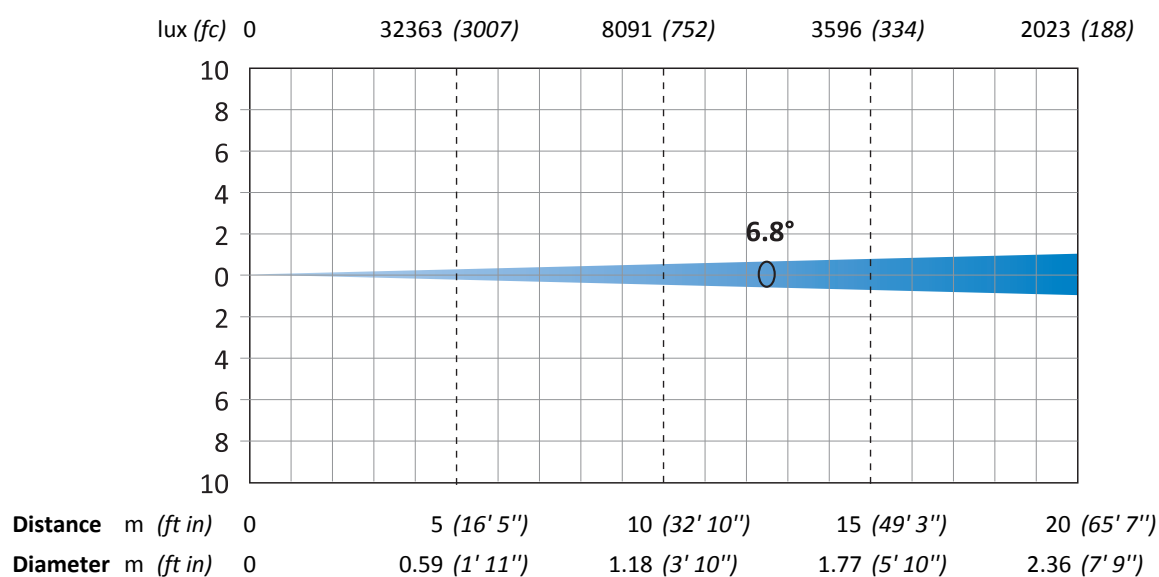

600W POWER MODE

Maximum Zoom (40.6°)

Total Output: 19855 lumens - 600W POWER MODE

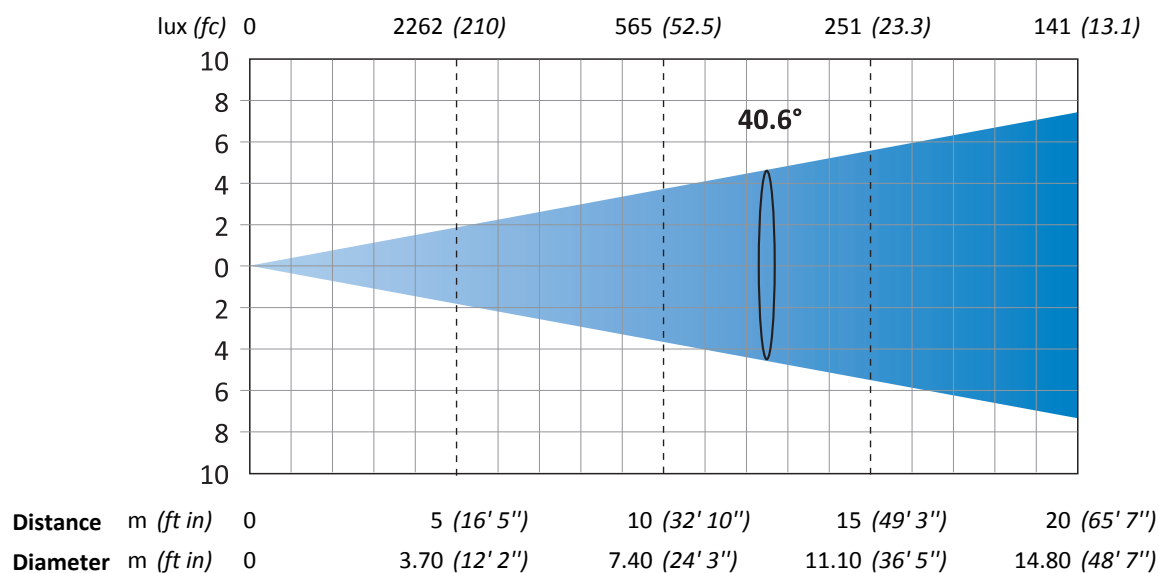


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS


Maximum Zoom with Light Frost (42.9° 10% - 38.6° 50%)

Total Output: 18330 lumens - 600W POWER MODE

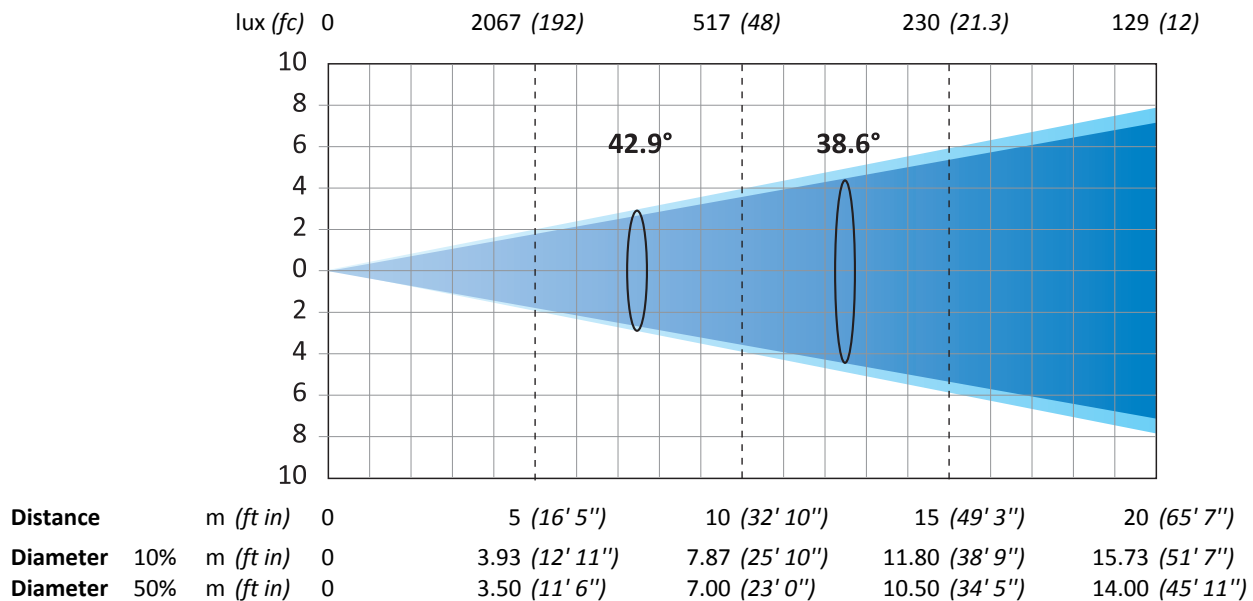

Maximum Zoom with Heavy Frost (43.6° 10% - 38.1° 50%)

Total Output: 18254 lumens - 600W POWER MODE

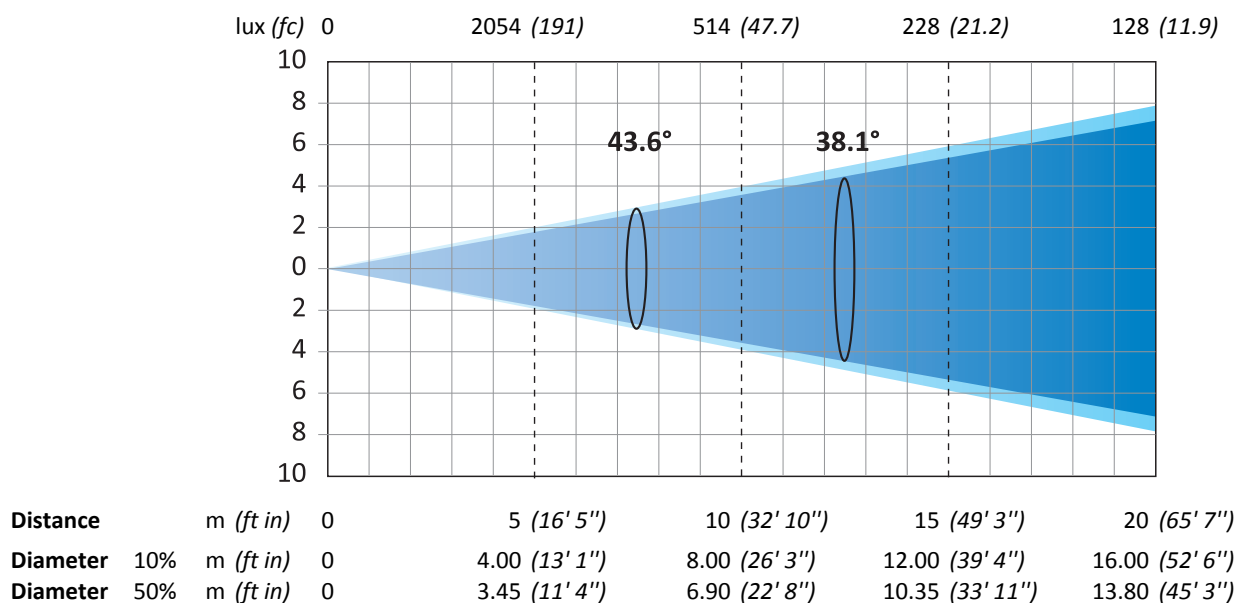


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS


Minimum Zoom (Zoom 50% - Focus 72%) (17.1°)

Total Output: 18502 lumens - 600W POWER MODE

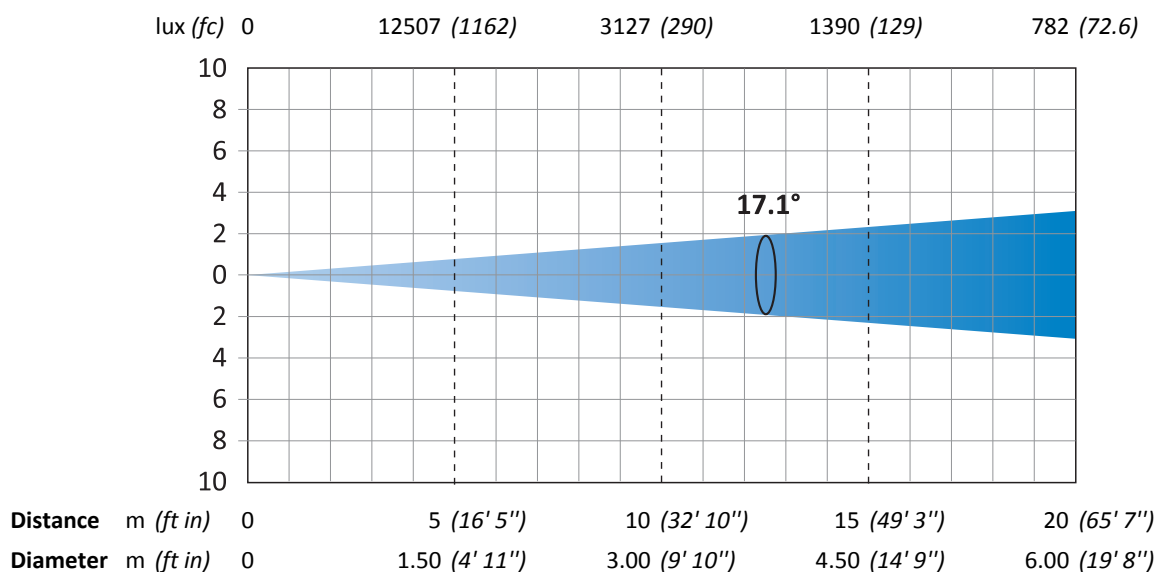

Minimum Zoom with Light Frost (Zoom 50% - Focus 72%) (18.1° 10% - 16.4° 50%)

Total Output: 17421 lumens - 600W POWER MODE

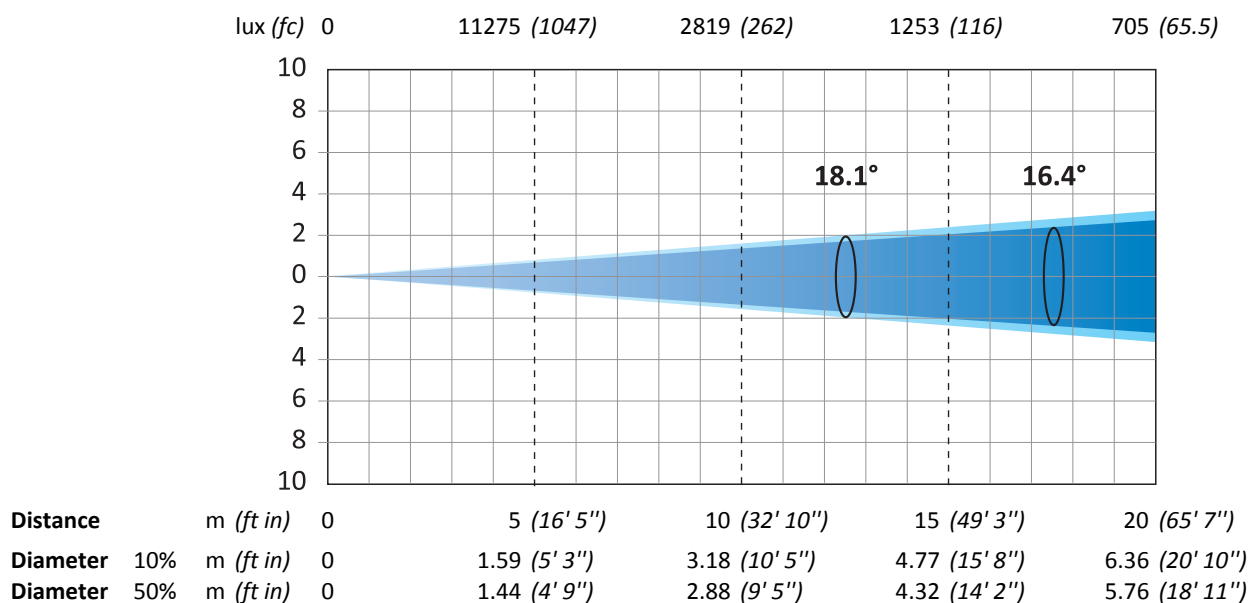

AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI

GB PHOTOMETRIC DIAGRAMMS


F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRISCHE DIAGRAMME

E DIAGRAMAS FOTOMÉTRICOS


Minimum Zoom with Heavy Frost (Zoom 50% - Focus 72%) (19.4° 10% - 15.9° 50%)

Total Output: 17318 lumens - 600W POWER MODE

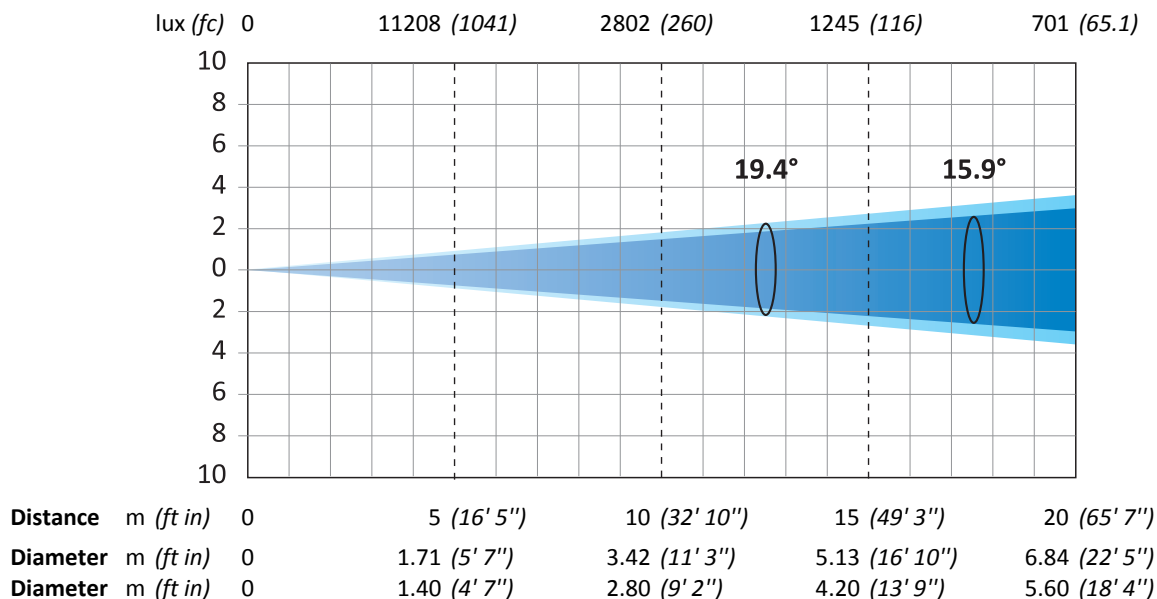

Minimum Zoom in extra-run (6.8°)

Total Output: 6435 lumens - 600W POWER MODE

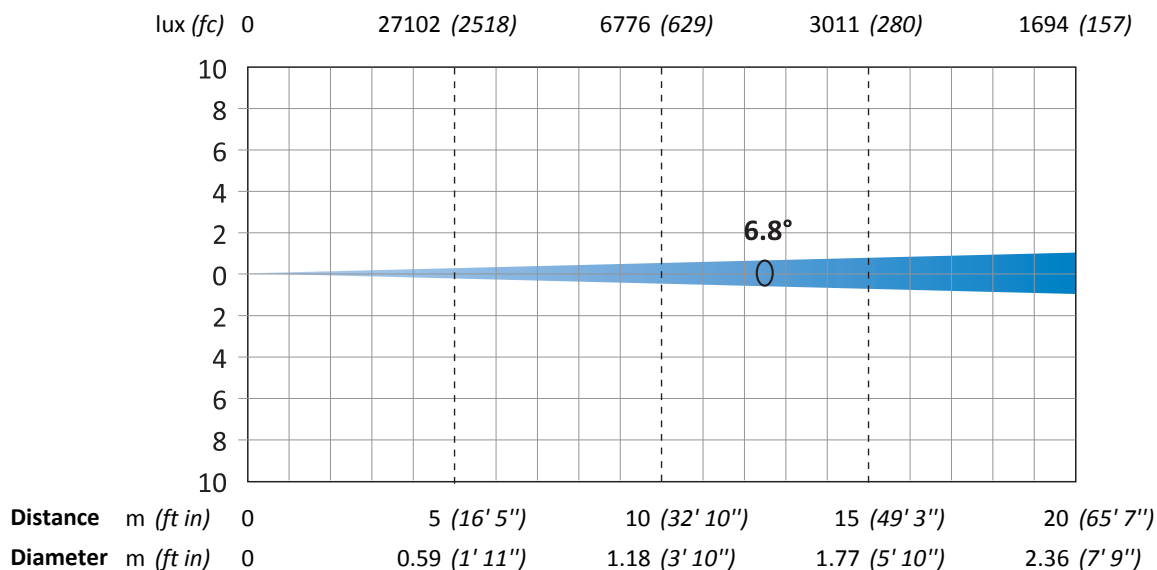

AXCOR PROFILE 900-8K


I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS

400W POWER MODE


Maximum Zoom (40.6°)

Total Output: 15632 lumens - 400W POWER MODE

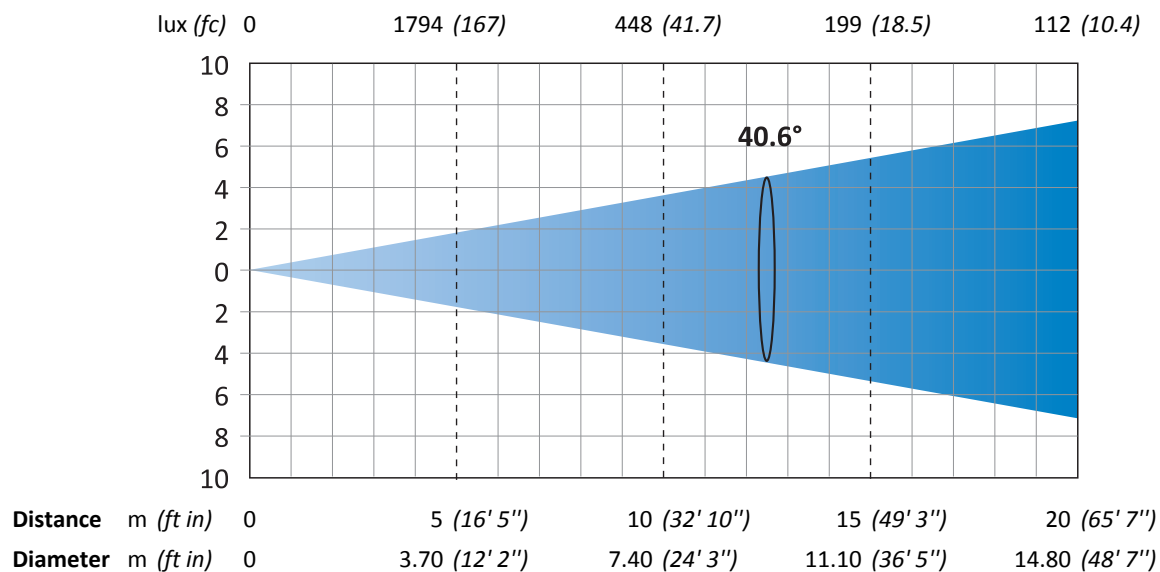

Maximum Zoom with Light Frost (42.9° 10% - 38.8° 50%)

Total Output: 14586 lumens - 400W POWER MODE

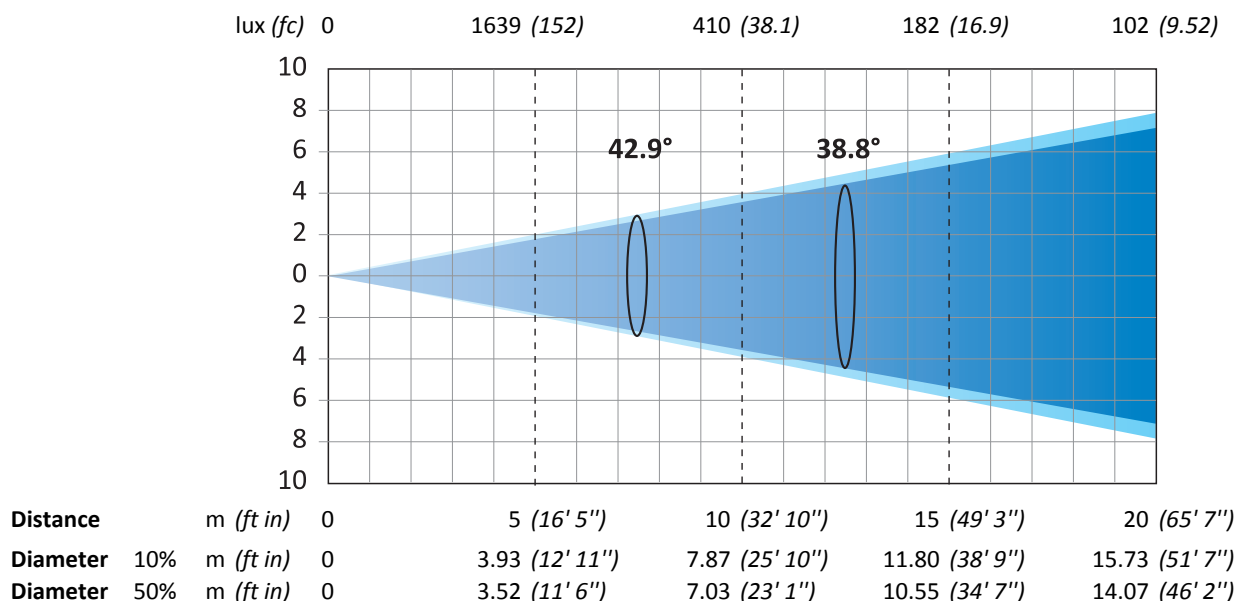


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS


Maximum Zoom with Heavy Frost (43.6° 10% - 38.1° 50%)

Total Output: 14488 lumens - 400W POWER MODE

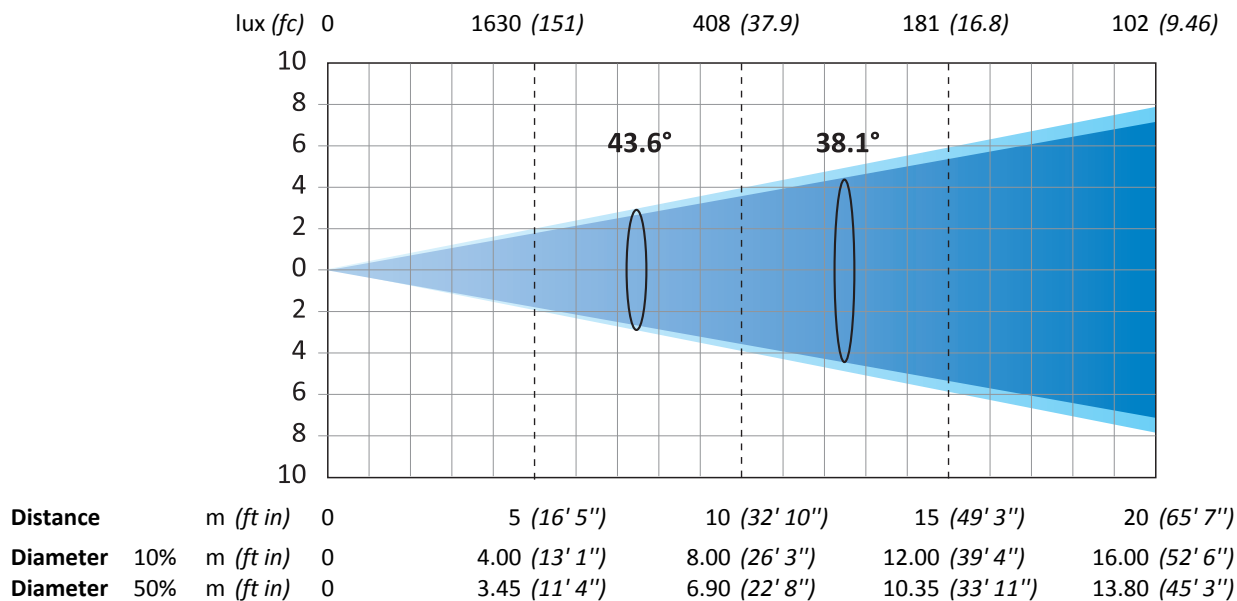

Minimum Zoom (Zoom 50% - Focus 72%) (17.1°)

Total Output: 14831 lumens - 400W POWER MODE

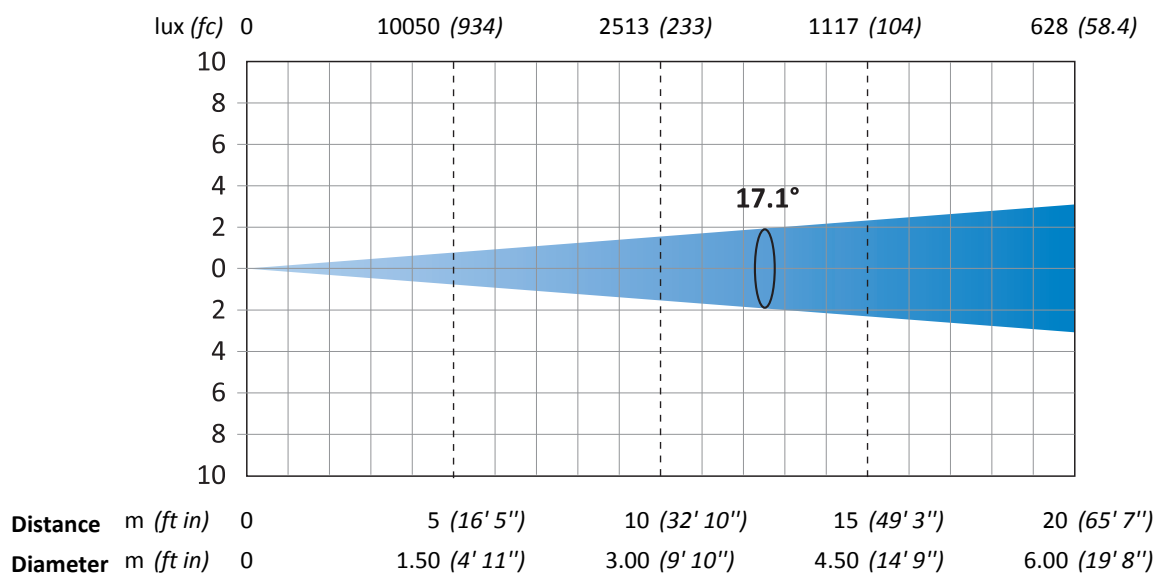


AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMAS FOTOMÉTRICOS

Minimum Zoom with Light Frost (Zoom 50% - Focus 72%) (18.1° 10% - 16.4° 50%)


Total Output: 13836 lumens - 400W POWER MODE

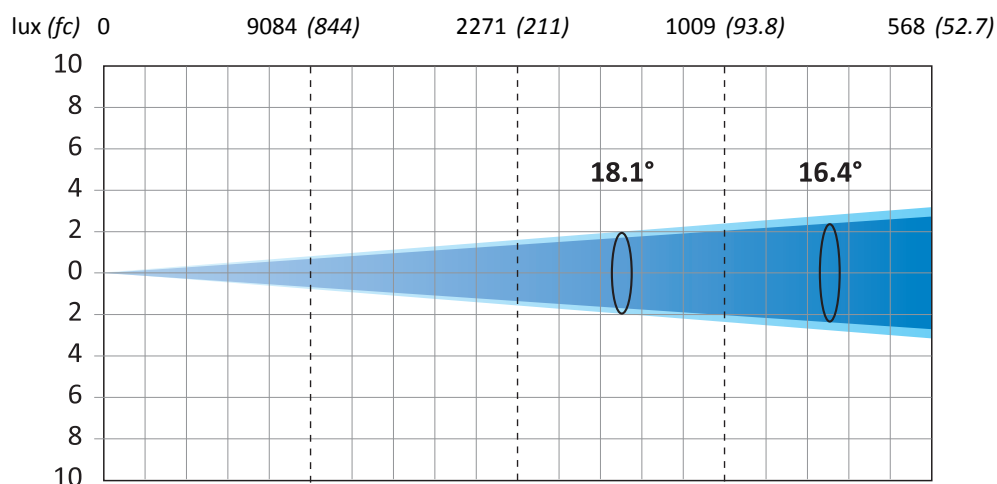

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	1.59 (5' 3")	3.18 (10' 5")	4.77 (15' 8")	6.36 (20' 10")
Diameter 50%	m (ft in)	0	1.44 (4' 9")	2.88 (9' 5")	4.32 (14' 2")	5.76 (18' 11")

Minimum Zoom with Heavy Frost (Zoom 50% - Focus 72%) (19.3° 10% - 15.9° 50%)

Total Output: 13778 lumens - 400W POWER MODE

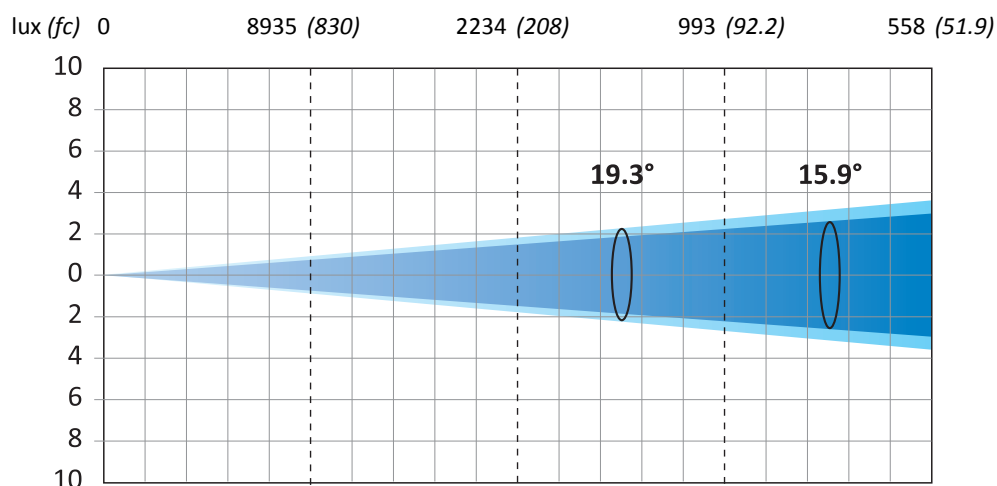

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	1.70 (5' 7")	3.40 (11' 2")	5.10 (16' 9")	6.80 (22' 4")
Diameter 50%	m (ft in)	0	1.40 (4' 7")	2.80 (9' 2")	4.20 (13' 9")	5.60 (18' 4")

AXCOR PROFILE 900-8K

I DIAGRAMMI FOTOMETRICI

GB PHOTOMETRIC DIAGRAMMS

F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRISCHE DIAGRAMME

E DIAGRAMAS FOTOMÉTRICOS

Minimum Zoom in extra-run (6.8°)

Total Output: 5252 lumens - 400W POWER MODE

